

水分分离器 Water Separator KAMG /主路过滤器 Mail Line Filter KAFF /油雾分离器 Oil Mist Separator KAM /微雾分离器 Micro Mist Separator KAMD /微雾分离器带前置过滤 Micro Mist Separator with Prefilter KAMH



KAMG/KAFF/KAM
/KAMD/KAMH

型号 Model	接管口径 Port Size Rc(PT)	额定流量 Flow Rate (l/min)					工作压力范围 Operating Pressure Range
		KAMG	KAFF	KAM	KAMD	KAMH	
150	1/8"	300	300	300	200	200	0.15~1.0 MPa
250	1/4"	750	750	750	500	500	
350	3/8", 1/2"	1500	1500	1500	1000	1000	
450	3/4"	2200	2200	2200	2000	2000	
550	3/4", 1"	3500	3500	3500	3500	3500	
650	1 1/2"	6000	6000	6000	6000	6000	
850	1 1/2", 2"	12000	12000	12000	12000	12000	
过滤精度 Filtration	99% 除水率 Removal rate of water	1 μm	0.1 μm	0.01 μm	0.01 μm	0.01 μm	

空气过滤器组合 F.R.L. Combinations

三联件 Air Filter + Regulator + Lubricator



KAF+KAR+KAL

型号 Model		组件 Components			额定 流量 Flow Rate (l/min)	接管 口径 Port Size Rc(PT)	压力表 口径 Gauge Port Size Rc(PT)	支架 (2件) Bracket (2 pcs.)
手动 排水型 Manual Drain	自动 排水型 Auto Drain	过滤器 Air Filter	调压阀 Regulator	油雾器 Lubricator				
KAC2000-02	KAC2000-02D	KAF2000	KAR2000	KAL2000	500	1/4"	1/8"	B210T
KAC3000-03	KAC3000-03D	KAF3000	KAR3000	KAL3000	2000	3/8"	1/8"	B310L
KAC4000-04	KAC4000-04D	KAF4000	KAR4000	KAL4000	4000	1/2"	1/4"	B410L
KAC4000-06	KAC4000-06D	KAF4000	KAR4000	KAL4000	4500	3/4"	1/4"	B510L
KAC6000-06	KAC6000-06D	KAF6000	KAR6000	KAL6000	6000	3/4"	1/4"	B610L
KAC6000-10	KAC6000-10D	KAF6000	KAR6000	KAL6000	6000	1"	1/4"	B610L

二联件 Filter Regulator + Lubricator



KAW+KAL

型号 Model		组件 Components		额定 流量 Flow Rate (l/min)	接管 口径 Port Size Rc(PT)	压力表 口径 Gauge Port Size Rc(PT)	支架 Bracket
手动 排水型 Manual Drain	自动 排水型 Auto Drain	过滤 调压阀 Filter Regulator	油雾器 Lubricator				
KAC2010-02	KAC2010-02D	KAW2000	KAL2000	500	1/4"	1/8"	B210T
KAC3010-03	KAC3010-03D	KAW3000	KAL3000	1700	3/8"	1/8"	B310T
KAC4010-04	KAC4010-04D	KAW4000	KAL4000	3000	1/2"	1/4"	B410T
KAC6010-06	KAC6010-06D	KAW6000	KAL6000	4500	3/4"	1/4"	B610T
KAC6010-10	KAC6010-10D	KAW6000	KAL6000	4500	1"	1/4"	B610T

空气管道元件 Air Pipe Line Components

空气过滤器 Air Filter



KAF

型号 Model		额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	杯容量 Bowl Capacity (cm ³)	支架 Bracket	过滤精度 Filtration
手动排水型 Manual Drain	自动排水型 Auto Drain					
KAF2000-02	KAF2000-02D	750	1/4"	15	B200	10 μm
KAF3000-03	KAF3000-03D	2000	3/8"	20	B300	
KAF4000-04	KAF4000-04D	4000	1/2"	45	B400	
KAF4000-06	KAF4000-06D	6000	3/4"	45	B400	
KAF6000-06	KAF6000-06D	7000	3/4"	130	B600	
KAF6000-10	KAF6000-10D	7000	1"	130	B600	

调压阀 Regulator



KAR

型号 Model	额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	压力表口径 Gauge Port Size Rc(PT)	支架 Bracket
KAR1000-M5	115	M5	1/16"	B120
KAR1000-01	115	1/8"	1/16"	B120
KAR2000-02	500	1/4"	1/8"	B220
KAR3000-03	2500	3/8"	1/8"	B320
KAR4000-04	6000	1/2"	1/4"	B420
KAR4000-06	6000	3/4"	1/4"	B420
KAR6000-06	8000	3/4"	1/4"	B420
KAR6000-10	8000	1"	1/4"	B420

小型调压阀 Minitype Regulator



KAR20S

型号 Model	额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	压力表口径 Gauge Port Size Rc(PT)
KAR20S	700	1/8", 1/4"	1/8"

注: 压力调整范围可选: 0.15~2 bar, 0.5~4 bar, 0.5~7 bar, 0.5~10 bar

Note: Optional regulating pressure range: 0.15~2 bar, 0.5~4 bar, 0.5~7 bar, 0.5~10 bar.

油雾器 Lubricator



KAL

型号 Model	最低操作流量 Min. Flow (l/min)	额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	杯容量 Bowl Capacity (cm ³)	支架 Bracket
KAL2000-02	15	800	1/4"	25	B200
KAL3000-03	40	1700	3/8"	50	B300
KAL4000-04	50	5000	1/2"	130	B400
KAL4000-06	50	6300	3/4"	130	B400
KAL6000-06	190	7000	3/4"	130	B600
KAL6000-10	190	7000	1"	130	B600

空气管道元件 Air Pipe Line Components

过滤器带调压阀 Filter Regulator



KAW

型号 Model		额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	压力表口径 Gauge Port Size Rc(PT)	支架 Bracket	过滤精度 Filtration
手动排水型 Manual Drain	自动排水型 Auto Drain					
KAW2000-02	KAW2000-02D	550	1/4"	1/8"	B220	10 μm
KAW3000-03	KAW3000-03D	2000	3/8"	1/8"	B320	
KAW4000-04	KAW4000-04D	4000	1/2"	1/4"	B420	
KAW6000-06	KAW6000-06D	6000	3/4"	1/4"	B600	
KAW6000-10	KAW6000-10D	6000	1"	1/4"	B600	

油雾分离器 Oil Mist Separator



KAFM

型号 Model		额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	支架 Bracket	过滤精度 Filtration
手动排水型 Manual Drain	自动排水型 Auto Drain				
KAFM2000-02	KAFM2000-02D	200	1/4"	B200	0.3 μm
KAFM3000-03	KAFM3000-03D	450	3/8"	B300	
KAFM4000-04	KAFM4000-04D	1100	1/2"	B400	

微雾分离器 Micro Mist Separator



KAFD

型号 Model		额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	支架 Bracket	过滤精度 Filtration
手动排水型 Manual Drain	自动排水型 Auto Drain				
KAFD2000-02	KAFD2000-02D	120	1/4"	B200	0.01 μm
KAFD3000-03	KAFD3000-03D	240	3/8"	B300	
KAFD4000-04	KAFD4000-04D	600	1/2"	B400	

排气洁净器 Exhaust Cleaner



KAMC

型号 Model	接管口径 Port Size Rc(PT)	螺纹形式 Thread type	有效截面积 Effective Sectional Area (mm ²)	最大处理流量 Max. Flow Rate (l/min)
KAMC220-02	1/4"	内螺纹 Female	12	200
KAMC320-02	1/4"		16	300
KAMC320-03	3/8"		16	300
KAMC520-04	1/2"		55	1000
KAMC520-06	3/4"		55	1000

大流量空气管道元件 Large Flow Air Pipe Line Components

大流量空气过滤器 Large Flow Air Filter



KAF900

型号 Model		额定流量	接管口径	杯容量	滤杯材料	过滤精度
手动排水型 Manual Drain	自动排水型 Auto Drain	Flow Rate (l/min)	Port Size Rc(PT)	Bowl Capacity (cm³)	Bowl material	Filtration
KAF800-14	AF800-14D	12000	1 1/2	1200	压铸铝 Aluminum die casting	5 μm, 40 μm
KAF900-14	AF900-14D	21200	1 1/2"	4700	浇铸铝 Aluminum casting	
KAF900-20	AF900-20D	21200	2"	4700		

大流量调压阀 Large Flow Regulator



KAR925

型号 Model	额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	压力表口径 Gauge Port Size Rc(PT)
KAR825-14	12400	1 1/2"	1/4"
KAR925-20	56600	2"	1/4"

大流量油雾器/微雾器 Large Flow Lubricator



KAL800

KAL800-M

型号 Model	额定流量 Flow Rate (l/min)	接管口径 Port Size Rc(PT)	杯容量 Bowl Capacity (cm³)
KAL800-14 (油雾 Mist)	7700	1 1/2"	750
KAL800-14-M (微雾 Micro mist)	7700	1 1/2"	750

PAGE

4

D系列/气源处理件 Serial D/Air Preparation

二联件 Filter Regulator + Lubricator



FRC-D

型号 Model	额定流量Flow Rate (l/min)													压力调节 范围 Regulating pressure range	过滤 精度 Filtration			
	G1/8			G1/4			G3/8		G1/2			G3/4				G1		
	MINI	MINI	MIDI	MINI	MIDI	MIDI	MAXI	DI-MAXI	MIDI	MAXI	DI-MAXI	MAXI	DI-MAXI					
FRC-*-D-*(-A)	700	1000	1500	1200	2000	2600	7600	2000	2600	8300	4100	8500	2500	0.5~12 bar	40 μm			
FRC-*-D-7-*(-A)	800	1300	1700	1500	2000	2800	7700	5000	2800	8500	4600	8700	4300	0.5~7 bar	40 μm			
FRC-*-D-5M-*(-A)	600	850	1300	1050	1700	1800	6800	1900	2100	7000	3200	7200	3500	0.5~12 bar	5 μm			

D系列/气源处理件 Serial D/Air Preparation

过滤器带调压阀 Filter Regulator



LFR-D

型号 Model	额定流量Flow Rate (l/min)													压力调节 范围 Regulating pressure range	过滤 精度 Filtration
	G1/8		G1/4		G3/8		G1/2			G3/4			G1		
	MINI	MINI	MIDI	MINI	MIDI	MIDI	MAXI	DI-MAXI	MIDI	MAXI	DI-MAXI	MAXI	DI-MAXI		
LFR-*-D-*(-A)	750	1400	2000	1600	3100	3400	9400	4500	3400	9700	6800	10000	7000	0.5~12 bar	40 μm
LFR-*-D-7-*(-A)	900	1500	2100	1700	3200	3900	9500	7600	4000	10000	7700	11000	7800	0.5~7 bar	40 μm
LFR-*-D-5M-*(-A)	650	1200	1600	1300	2400	2500	7580	4000	2600	7600	5800	8000	6000	0.5~12 bar	5 μm

过滤器 Filter



LF-D

型号 Model	额定流量Flow Rate (l/min)										过滤 精度 Filtration
	G1/8	G1/4		G3/8		G1/2		G3/4		G1	
	MINI	MINI	MIDI	MINI	MIDI	MIDI	MAXI	MIDI	MAXI	MAXI	
LF-*-D-*(-A)	1000	1200	1900	1400	2700	3000	4400	3000	5000	5300	40 µm
LF-*-D-5M-*(-A)	800	950	1600	1100	1800	2000	3700	2000	3600	3800	5 µm

调压阀 Regulator



LR-D

型号 Model	额定流量Flow Rate (l/min)													压力调节 范围 Regulating pressure range	
	G1/8		G1/4		G3/8		G1/2			G3/4			G1		
	MINI	MINI	MIDI	MINI	MIDI	MIDI	MAXI	DI-MAXI	MIDI	MAXI	DI-MAXI	MAXI	DI-MAXI		
LR-*-D-*	800	1500	2100	1700	3200	3500	10500	7300	3500	11000	8350	11500	8400	0.5~12 bar	
LR-*-D-7-*	1000	1600	2200	1800	3300	4000	10700	5400	4500	12000	6800	12500	7000	0.5~7 bar	

油雾器 Lubricator



LOE-D

型号 Model	额定流量Flow Rate (l/min)									
	G1/8	G1/4		G3/8		G1/2		G3/4		G1
	MINI	MINI	MIDI	MINI	MIDI	MIDI	MAXI	MIDI	MAXI	MAXI
LOE-*-D-*	1300	2300	2800	2700	5500	6100	8300	6300	8400	9000

压力控制阀 Pressure Controller

精密调压阀 Precision Regulator



KIR

型号 Model	设定压力范围 Setting Pressure Range (MPa)	接管口径 Port Size Rc(PT)	压力表口径 Gauge Port Size Rc(PT)
KIR1000-01	0.01~0.2	1/8"	1/8"
KIR1010-01	0.01~0.4	1/8"	1/8"
KIR1020-01	0.01~0.8	1/8"	1/8"
KIR2000-02	0.01~0.2	1/4"	1/8"
KIR2010-02	0.01~0.4	1/4"	1/8"
KIR2020-02	0.01~0.8	1/4"	1/8"
KIR3000-03	0.01~0.2	3/8"	1/8"
KIR3010-03	0.01~0.4	3/8"	1/8"
KIR3020-03	0.01~0.8	3/8"	1/8"
KIR3000-04	0.01~0.2	1/2"	1/8"
KIR3010-04	0.01~0.4	1/2"	1/8"
KIR3020-04	0.01~0.8	1/2"	1/8"

电气比例阀 Electro-Pneumatic Proportional Regulator



KITV

型号 Model	调压范围 Regulating Pressure Range (KPa)	输入信号 Input	电信号输出 Output	接管口径 Port Size
KITV1010	0~100 (0~1 bar)			
KITV1020	0~300 (0~3 bar)			
KITV1030	0~500 (0~5 bar)			G1/8"
KITV1040	0~800 (0~8 bar)			G1/4"
KITV1050	0~900 (0~9 bar)			
KITV2010	0~100 (0~1 bar)	4~20 mA		
KITV2020	0~300 (0~3 bar)	0~20 mA	DC 1~5 V	
KITV2030	0~500 (0~5 bar)	DC 0~5 V	NPN	G1/4"
KITV2040	0~800 (0~8 bar)	DC 0~10 V	PNP	G3/8"
KITV2050	0~900 (0~9 bar)	4点预设输入 4-point preset input	4~20 mA	
KITV3010	0~100 (0~1 bar)			
KITV3020	0~300 (0~3 bar)			G1/4"
KITV3030	0~500 (0~5 bar)			G3/8"
KITV3040	0~800 (0~8 bar)			G1/2"
KITV3050	0~900 (0~9 bar)			

压力表 Pressure Gauge

压力表 Pressure Gauge



KG40

型号 Model	压力范围 Pressure Range (MPa)	适用型号 Applicable Models
KG40-02-01	0~0.2 (0~2 kgf/cm ²)	KAR20, KAR20S
KG40-04-01	0~0.4 (0~4 kgf/cm ²)	KAR20, KAR20S
KG40-10-01	0~1 (0~10 kgf/cm ²)	KAR20, KAR20S KAR2000, KAR3000, KAW2000, KAW3000, KAC2000, 2010, 2020, 2030, 2040, KAC3000, 3010, 3020, 3030, 3040,
KG50-10-02	0~1 (0~10 kgf/cm ²)	KAR4000, KAR6000, KAW4000, KAW6000, KAC4000, 4010, 4020, 4030, 4040, KAC6000, KAC6010, KAC6020

压力表 Pressure Gauge / 压力开关 Pressure Switch

面板型压力表 Panel Mounting Pressure Gauge



KG40P

型号 Model	压力范围 Pressure Range (MPa)	外形尺寸 Dimensions (mm)
KG40P-02-01	0~0.2 (0~2 kgf/cm ²)	
KG40P-04-01	0~0.4 (0~4 kgf/cm ²)	
KG40P-10-01	0~1 (0~10 kgf/cm ²)	

压力开关 Pressure Switch



KSNS

型号 Model	设定压力范围 Setting Pressure Range (MPa)	压差调整范围 Regulating Hysteresis Range (MPa)	耐压力 Proof Pressure (MPa)	接管口径 Port Size Rc(PT)
KSNS-C103	-0.07~0.3	0.04~0.2	1.1	1/4"
KSNS-C106	-0.07~0.6	0.06~0.4	1.65	1/4"
KSNS-C110	0.1~1	0.1~0.3	1.65	1/4"
KSNS-C120	0.5~2	0.2~0.4	4	1/4"
KSNS-C130	0.5~3	0.5~1.0	4	1/4"

数显型压力开关 Pressure Switch with Digital Display



KP43



KP47

型号 Model	设定压力范围 Setting Pressure Range	设定压力精度 Setting Pressure Resolution	耐压力 Proof Pressure	输出 Output	使用流体 Fluid
KP43P-010-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 NPN & 模拟Analog (1~5 V)	空气; 非腐蚀性 不可燃 气体 Air, neither corrosive nor flammable gas
KP43P-011-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 NPN & 模拟Analog (4~20 mA)	
KP43P-02-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 NPN & 复制功能Copy	
KP43P-030-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 PNP & 模拟Analog (1~5 V)	
KP43P-031-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 PNP & 模拟Analog (4~20 mA)	
KP43P-04-F1	-0.1~1.0 MPa	0.001 MPa	1.5 MPa	2 PNP & 复制功能Copy	
KP43V-010-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 NPN & 模拟Analog (1~5 V)	
KP43V-011-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 NPN & 模拟Analog (4~20 mA)	
KP43V-02-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 NPN & 复制功能Copy	
KP43V-030-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 PNP & 模拟Analog (1~5 V)	
KP43V-031-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 PNP & 模拟Analog (4~20 mA)	
KP43V-04-F1	-101.3~10 KPa	0.1 KPa	300 KPa	2 PNP & 复制功能Copy	
KP43C-010-F1	-101~101 KPa	0.1 KPa	300 KPa	2 NPN & 模拟Analog (1~5 V)	
KP43C-011-F1	-101~101 KPa	0.1 KPa	300 KPa	2 NPN & 模拟Analog (4~20 mA)	
KP43C-02-F1	-101~101 KPa	0.1 KPa	300 KPa	2 NPN & 复制功能Copy	
KP43C-030-F1	-101~101 KPa	0.1 KPa	300 KPa	2 PNP & 模拟Analog (1~5 V)	
KP43C-031-F1	-101~101 KPa	0.1 KPa	300 KPa	2 PNP & 模拟Analog (4~20 mA)	
KP43C-04-F1	-101~101 KPa	0.1 KPa	300 KPa	2 PNP & 复制功能Copy	
KP47P-01	-0.103~1.03 MPa	0.001 MPa	1.5 MPa	1 NPN & 模拟Analog (1~5 V)	
KP47P-03	-0.103~1.03 MPa	0.001 MPa	1.5 MPa	1 PNP & 模拟Analog (1~5 V)	
KP47C-01	-103~103 KPa	0.1 KPa	500 KPa	1 NPN & 模拟Analog (1~5 V)	
KP47C-03	-103~103 KPa	0.1 KPa	500 KPa	1 PNP & 模拟Analog (1~5 V)	

电磁阀 Solenoid Valve

微型电磁阀 Miniature Valve



KSV100/KSV150 KSV200

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	通径 Orifice (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KSV100	2位3通 3/2-way	M5	Ø0.6, Ø0.7, Ø0.9	0~0.75	直动常闭/常开 Direct operated, N.C./ N.O.
KSV150		M5	Ø0.7, Ø0.9	0~0.75	
KSV200		M5	Ø1.1, Ø1.3	0~0.7	

3通电磁阀 3-Port Solenoid Valve



KSV110/KSV210 KVV312/KVZ512

KVT307 KVP342/KVP542/KVP642

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KSV210	2位3通 3/2-way N.O. /N.C.	M5	Ø1.1	0~0.8	直动型 Direct operated
KSV110		1/8"	Ø1.5	0~0.8	
KVT307		1/4"	3.5	0~0.7	
KVZ300		M5	3.6	0.15~1.0	先导型 Pilot operated
KVZ500		1/8"	12.6	0.15~1.0	
KVP342		1/4"	19	0.15~1.0	
KVP542		3/8"	36	0.15~1.0	
KVP642		1/2"	65	0.15~1.0	

5通电磁阀 5-Port Solenoid Valve



KVZ3120



KVZ5120



KVF3130



KVF5120

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KVZ3120	单线圈 Single	M5	3.6	0.15~1.0	先导型 Pilot operated
KVZ3220	双线圈 Double	M5	3.6	0.15~1.0	
KVZ3320	3位5通,中央封闭 5/3-way, closed center	M5	3	0.2~1.0	
KVZ3420	3位5通,中央排气 5/3-way, exhaust center	M5	3	0.2~1.0	
KVZ3520	3位5通,中央加压 5/3-way, pressure center	M5	3	0.2~1.0	
KVZ5120	单线圈 Single	1/8"	12.6	0.15~1.0	
KVZ5220	双线圈 Double	1/8"	12.6	0.15~1.0	
KVZ5320	3位5通,中央封闭 5/3-way, closed center	1/8"	9	0.2~1.0	
KVZ5420	3位5通,中央排气 5/3-way, exhaust center	1/8"	9	0.2~1.0	
KVZ5520	3位5通,中央加压 5/3-way, pressure center	1/8"	9	0.2~1.0	
KVF3130	单线圈 Single	1/4"	19	0.15~1.0	
KVF3230	双线圈 Double	1/4"	19	0.15~1.0	
KVF3330	3位5通,中央封闭 5/3-way, closed center	1/4"	11.5	0.2~1.0	
KVF3430	3位5通,中央排气 5/3-way, exhaust center	1/4"	11.5	0.2~1.0	
KVF3530	3位5通,中央加压 5/3-way, pressure center	1/4"	11.5	0.2~1.0	
KVF5120	单线圈 Single	3/8"	36	0.15~1.0	
KVF5220	双线圈 Double	3/8"	36	0.15~1.0	
KVF5320	3位5通,中央封闭 5/3-way, closed center	3/8"	30	0.2~1.0	
KVF5420	3位5通,中央排气 5/3-way, exhaust center	3/8"	30	0.2~1.0	
KVF5520	3位5通,中央加压 5/3-way, pressure center	3/8"	30	0.2~1.0	
KVF6120	单线圈 Single	1/2"	65	0.15~1.0	
KVF6220	双线圈 Double	1/2"	65	0.15~1.0	
KVF6320	3位5通,中央封闭 5/3-way, closed center	1/2"	50	0.2~1.0	
KVF6420	3位5通,中央排气 5/3-way, exhaust center	1/2"	50	0.2~1.0	
KVF6520	3位5通,中央加压 5/3-way, pressure center	1/2"	50	0.2~1.0	

电磁阀 Solenoid Valve



KVF6140



KVF7140



KVF8140

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KVF6140	单线圈 Single	1/4", 3/8", 1/2"	30	0.15~1.0	先导型 Pilot operated 底座 配管 Base ported
KVF6240	双线圈 Double	1/4", 3/8", 1/2"	30	0.15~1.0	
KVF6340	3位5通, 中央封闭 5/3-way, closed center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVF6440	3位5通, 中央排气 5/3-way, exhaust center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVF6540	3位5通, 中央加压 5/3-way, pressure center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVF7140	单线圈 Single	3/8", 1/2", 3/4"	65	0.15~1.0	
KVF7240	双线圈 Double	3/8", 1/2", 3/4"	65	0.15~1.0	
KVF7340	3位5通, 中央封闭 5/3-way, closed center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVF7440	3位5通, 中央排气 5/3-way, exhaust center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVF7540	3位5通, 中央加压 5/3-way, pressure center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVF8140	单线圈 Single	3/4", 1"	90	0.2~1.0	
KVF8240	双线圈 Double	3/4", 1"	90	0.2~1.0	
KVF8340	3位5通, 中央封闭 5/3-way, closed center	3/4", 1"	70	0.25~1.0	
KVF8440	3位5通, 中央排气 5/3-way, exhaust center	3/4", 1"	70	0.25~1.0	
KVF8540	3位5通, 中央加压 5/3-way, pressure center	3/4", 1"	70	0.25~1.0	

PAGE

9

5通电磁阀 5-Port Solenoid Valve



KSY3120S



KSY5120S



KSY7120S

型号 Model	结构 Configuration	接管 口径 Port Size	Cv		工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
			P-A/B	A/B-R/S		
KSY3120S	单线圈 Single	M5	0.25	0.27	0.15~0.7	先导型 Pilot operated
KSY3220S	双线圈 Double	M5	0.25	0.27	0.15~0.7	
KSY3320S	3位5通, 中央封闭 5/3-way, closed center	M5	0.19	0.20	0.2~0.7	
KSY3420S	3位5通, 中央排气 5/3-way, exhaust center	M5	0.19	0.25	0.2~0.7	
KSY3520S	3位5通, 中央加压 5/3-way, pressure center	M5	0.30	0.25	0.2~0.7	
KSY5120S	单线圈 Single	G1/8"	0.67	0.69	0.15~0.7	
KSY5220S	双线圈 Double	G1/8"	0.67	0.69	0.15~0.7	
KSY5320S	3位5通, 中央封闭 5/3-way, closed center	G1/8"	0.52	0.49	0.2~0.7	
KSY5420S	3位5通, 中央排气 5/3-way, exhaust center	G1/8"	0.46	0.75	0.2~0.7	
KSY5520S	3位5通, 中央加压 5/3-way, pressure center	G1/8"	0.89	0.50	0.2~0.7	
KSY7120S	单线圈 Single	G1/4"	1.15	1.05	0.15~0.7	
KSY7220S	双线圈 Double	G1/4"	1.15	1.05	0.15~0.7	
KSY7320S	3位5通, 中央封闭 5/3-way, closed center	G1/4"	0.84	0.75	0.2~0.7	
KSY7420S	3位5通, 中央排气 5/3-way, exhaust center	G1/4"	0.74	1.15	0.2~0.7	
KSY7520S	3位5通, 中央加压 5/3-way, pressure center	G1/4"	1.36	0.66	0.2~0.7	

电磁阀 Solenoid Valve

3通电磁阀 3-Port Solenoid Valve



3V110



3V210

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
3V110	单线圈 Single	M5, 1/8	10.0, 12.0	0.15~0.8	先导型 Pilot operated
3V120	双线圈 Double	M5, 1/8	10.0, 12.0	0.15~0.8	
3V210	单线圈 Single	1/8, 1/4	14.0, 16.0	0.15~0.8	
3V220	双线圈 Double	1/8, 1/4	14.0, 16.0	0.15~0.8	
3V310	单线圈 Single	1/4, 3/8	25.0, 30.0	0.15~0.8	
3V320	双线圈 Double	1/4, 3/8	25.0, 30.0	0.15~0.8	

5通电磁阀 5-Port Solenoid Valve



4V110



4V210



4V310



4V410

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
4V110	单线圈 Single	M5, 1/8	10.0, 12.0	0.15~0.8	先导型 Pilot operated
4V120	双线圈 Double	M5, 1/8	10.0, 12.0	0.15~0.8	
4V130C	3位5通,中央封闭 5/3-way, closed center	M5, 1/8	7.0, 9.0	0.15~0.8	
4V130E	3位5通,中央排气 5/3-way, exhaust center	M5, 1/8	7.0, 9.0	0.15~0.8	
4V130P	3位5通,中央加压 5/3-way, pressure center	M5, 1/8	7.0, 9.0	0.15~0.8	
4V210	单线圈 Single	1/8, 1/4	14.0, 16.0	0.15~0.8	
4V220	双线圈 Double	1/8, 1/4	14.0, 16.0	0.15~0.8	
4V230C	3位5通,中央封闭 5/3-way, closed center	1/8, 1/4	12.0	0.15~0.8	
4V230E	3位5通,中央排气 5/3-way, exhaust center	1/8, 1/4	12.0	0.15~0.8	
4V230P	3位5通,中央加压 5/3-way, pressure center	1/8, 1/4	12.0	0.15~0.8	
4V310	单线圈 Single	1/4, 3/8	25.0, 30.0	0.15~0.8	
4V320	双线圈 Double	1/4, 3/8	25.0, 30.0	0.15~0.8	
4V330C	3位5通,中央封闭 5/3-way, closed center	1/4, 3/8	18.0	0.15~0.8	
4V330E	3位5通,中央排气 5/3-way, exhaust center	1/4, 3/8	18.0	0.15~0.8	
4V330P	3位5通,中央加压 5/3-way, pressure center	1/4, 3/8	18.0	0.15~0.8	
4V410	单线圈 Single	1/2	50	0.15~0.8	
4V420	双线圈 Double	1/2	50	0.15~0.8	
4V430C	3位5通,中央封闭 5/3-way, closed center	1/2	30	0.15~0.8	
4V430E	3位5通,中央排气 5/3-way, exhaust center	1/2	30	0.15~0.8	
4V430P	3位5通,中央加压 5/3-way, pressure center	1/2	30	0.15~0.8	

气控阀 Air Operated Valve

5通气控阀 5-Port Air Operated Valve



KVZA3120



KVFA6220



KVFA6140



KVFA8140

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效 截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KVZA3120	单气控 Single	M5	3.6	0.15~1.0	气控 Air operated
KVZA3220	双气控 Double	M5	3.6	0.15~1.0	
KVZA3320	3位5通,中央封闭 5/3-way, closed center	M5	3	0.2~1.0	
KVZA3420	3位5通,中央排气 5/3-way, exhaust center	M5	3	0.2~1.0	
KVZA3520	3位5通,中央加压 5/3-way, pressure center	M5	3	0.2~1.0	
KVZA5120	单气控 Single	1/8"	12.6	0.15~1.0	
KVZA5220	双气控 Double	1/8"	12.6	0.15~1.0	
KVZA5320	3位5通,中央封闭 5/3-way, closed center	1/8"	9	0.2~1.0	
KVZA5420	3位5通,中央排气 5/3-way, exhaust center	1/8"	9	0.2~1.0	
KVZA5520	3位5通,中央加压 5/3-way, pressure center	1/8"	9	0.2~1.0	
KVFA3130	单气控 Single	1/4"	19	0.15~1.0	
KVFA3230	双气控 Double	1/4"	19	0.15~1.0	
KVFA3330	3位5通,中央封闭 5/3-way, closed center	1/4"	11.5	0.2~1.0	
KVFA3430	3位5通,中央排气 5/3-way, exhaust center	1/4"	11.5	0.2~1.0	
KVFA3530	3位5通,中央加压 5/3-way, pressure center	1/4"	11.5	0.2~1.0	
KVFA5120	单气控 Single	3/8"	36	0.15~1.0	
KVFA5220	双气控 Double	3/8"	36	0.15~1.0	
KVFA5320	3位5通,中央封闭 5/3-way, closed center	3/8"	30	0.2~1.0	
KVFA5420	3位5通,中央排气 5/3-way, exhaust center	3/8"	30	0.2~1.0	
KVFA5520	3位5通,中央加压 5/3-way, pressure center	3/8"	30	0.2~1.0	
KVFA6120	单气控 Single	1/2"	65	0.15~1.0	
KVFA6220	双气控 Double	1/2"	65	0.15~1.0	
KVFA6320	3位5通,中央封闭 5/3-way, closed center	1/2"	50	0.2~1.0	
KVFA6420	3位5通,中央排气 5/3-way, exhaust center	1/2"	50	0.2~1.0	
KVFA6520	3位5通,中央加压 5/3-way, pressure center	1/2"	50	0.2~1.0	
KVFA6140	单气控 Single	1/4", 3/8", 1/2"	30	0.15~1.0	
KVFA6240	双气控 Double	1/4", 3/8", 1/2"	30	0.15~1.0	
KVFA6340	3位5通,中央封闭 5/3-way, closed center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVFA6440	3位5通,中央排气 5/3-way, exhaust center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVFA6540	3位5通,中央加压 5/3-way, pressure center	1/4", 3/8", 1/2"	25	0.2~1.0	
KVFA7140	单气控 Single	3/8", 1/2", 3/4"	65	0.15~1.0	
KVFA7240	双气控 Double	3/8", 1/2", 3/4"	65	0.15~1.0	
KVFA7340	3位5通,中央封闭 5/3-way, closed center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVFA7440	3位5通,中央排气 5/3-way, exhaust center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVFA7540	3位5通,中央加压 5/3-way, pressure center	3/8", 1/2", 3/4"	50	0.2~1.0	
KVFA8140	单气控 Single	3/4", 1"	90	0.2~1.0	
KVFA8240	双气控 Double	3/4", 1"	90	0.2~1.0	
KVFA8340	3位5通,中央封闭 5/3-way, closed center	3/4", 1"	70	0.25~1.0	
KVFA8440	3位5通,中央排气 5/3-way, exhaust center	3/4", 1"	70	0.25~1.0	
KVFA8540	3位5通,中央加压 5/3-way, pressure center	3/4", 1"	70	0.25~1.0	

气控阀 Air Operated Valve /手动阀 Hand Valve /机械阀 Mechanical Valve


3通气控阀 3-Port Air Operated Valve



KVPA542

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KVZA300	2位3通 3/2-way N.O. /N.C.	M5	3.6	0.15~1.0	气控 Air operated
KVZA500		1/8"	12.6	0.15~1.0	
KVPA342		1/4"	19	0.15~1.0	
KVPA542		3/8"	36	0.15~1.0	
KVPA642		1/2"	65	0.15~1.0	

3通气控阀 3-Port Air Operated Valve



3A210

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
3A110	单气控 Single	M5, 1/8	10.0, 12.0	0.15~0.8	气控 Air operated
3A120	双气控 Double	M5, 1/8	10.0, 12.0	0.15~0.8	
3A210	单气控 Single	1/8, 1/4	14.0, 16.0	0.15~0.8	
3A220	双气控 Double	1/8, 1/4	14.0, 16.0	0.15~0.8	
3A310	单气控 Single	1/4, 3/8	25.0, 30.0	0.15~0.8	
3A320	双气控 Double	1/4, 3/8	25.0, 30.0	0.15~0.8	

5通气控阀 5-Port Air Operated Valve



4A110



4A410

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
4A110	单气控 Single	M5, 1/8	10.0, 12.0	0.15~0.8	气控 Air operated
4A120	双气控 Double	M5, 1/8	10.0, 12.0	0.15~0.8	
4A130C	3位5通,中央封闭 5/3-way, closed center	M5, 1/8	7.0, 9.0	0.15~0.8	
4A130E	3位5通,中央排气 5/3-way, exhaust center	M5, 1/8	7.0, 9.0	0.15~0.8	
4A130P	3位5通,中央加压 5/3-way, pressure center	M5, 1/8	7.0, 9.0	0.15~0.8	
4A210	单气控 Single	1/8, 1/4	14.0, 16.0	0.15~0.8	
4A220	双气控 Double	1/8, 1/4	14.0, 16.0	0.15~0.8	
4A230C	3位5通,中央封闭 5/3-way, closed center	1/8, 1/4	12.0	0.15~0.8	
4A230E	3位5通,中央排气 5/3-way, exhaust center	1/8, 1/4	12.0	0.15~0.8	
4A230P	3位5通,中央加压 5/3-way, pressure center	1/8, 1/4	12.0	0.15~0.8	
4A310	单气控 Single	1/4, 3/8	25.0, 30.0	0.15~0.8	
4A320	双气控 Double	1/4, 3/8	25.0, 30.0	0.15~0.8	
4A330C	3位5通,中央封闭 5/3-way, closed center	1/4, 3/8	18.0	0.15~0.8	
4A330E	3位5通,中央排气 5/3-way, exhaust center	1/4, 3/8	18.0	0.15~0.8	
4A330P	3位5通,中央加压 5/3-way, pressure center	1/4, 3/8	18.0	0.15~0.8	
4A410	单气控 Single	1/2	50	0.15~0.8	
4A420	双气控 Double	1/2	50	0.15~0.8	
4A430C	3位5通,中央封闭 5/3-way, closed center	1/2	30	0.15~0.8	
4A430E	3位5通,中央排气 5/3-way, exhaust center	1/2	30	0.15~0.8	
4A430P	3位5通,中央加压 5/3-way, pressure center	1/2	30	0.15~0.8	

手动阀 Hand Valve /机械阀 Mechanical Valve

4通手动阀 4 Port Hand Valve



4HV230

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
4HV210-06	2位4通 4/2-way	1/8"	14	0~1.0	手动 Manual
4HV230-06	3位4通,中央封闭 4/3-way, closed center	1/8"	14	0~1.0	
4HV210-08	2位4通 4/2-way	1/4"	16	0~1.0	
4HV230-08	3位4通,中央封闭 4/3-way, closed center	1/4"	16	0~1.0	
4HV310-08	2位4通 4/2-way	1/4"	30	0~1.0	
4HV330-08	3位4通,中央封闭 4/3-way, closed center	1/4"	30	0~1.0	
4HV310-10	2位4通 4/2-way	3/8"	33	0~1.0	
4HV330-10	3位4通,中央封闭 4/3-way, closed center	3/8"	33	0~1.0	
4HV310-15	2位4通 4/2-way	1/2"	55	0~1.0	
4HV330-15	3位4通,中央封闭 4/3-way, closed center	1/2"	55	0~1.0	
4HV410-15	2位4通 4/2-way	1/2"	88	0~1.0	
4HV430-15	3位4通,中央封闭 4/3-way, closed center	1/2"	88	0~1.0	
4HV410-20	2位4通 4/2-way	3/4"	95	0~1.0	
4HV430-20	3位4通,中央封闭 4/3-way, closed center	3/4"	95	0~1.0	

机械阀 Mechanical Valve



KVM550

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KVM430	2位3通 3/2-way	1/8"	10.5	0~0.8	机械或手动 Mechanical or manual
KVM230	2位3通 3/2-way	1/4"	16	0~0.8	
KVZM550	3位5通 5/3-way	1/8"	12.6	0~0.8	
KVFM350	3位5通 5/3-way	1/4"	19	0~0.8	

流体电磁阀 Multiple Fluid Solenoid Valve

高压2通电磁阀 High Pressure 2-Port Solenoid Valve



KAB21H

型号 Model	接管口径 Port Size	通孔直径 Orifice (mm)	最低压差 Min. Differential Pressure (MPa)	最高压差(水,空气) Max. Differential Pressure (Air, Water) (MPa)		切换方式 Operation
				AC	DC	
KAB21H-01-01-	G1/8"	1.0	0	10	7.5	直动式 常闭型 Direct operated, N.C.
KAB21H-01-C1-	G1/8"	1.2	0	9	7	
KAB21H-01-C2-	G1/8"	1.5	0	7.5	5	
KAB21H-01-02-	G1/8"	2.0	0	3.5	3	
KAB21H-01-C3-	G1/8"	2.5	0	2	1.5	
KAB21H-02-01-	G1/4"	1.0	0	10	7.5	
KAB21H-02-C1-	G1/4"	1.2	0	9	7	
KAB21H-02-C2-	G1/4"	1.5	0	7.5	5	
KAB21H-02-02-	G1/4"	2.0	0	3.5	3	
KAB21H-02-C3-	G1/4"	2.5	0	2	1.5	
KAB21H-02-08-	G1/4"	8.0	0.5	9	7	
KAB21H-03-08-	G3/8"	8.0	0.5	9	7	
KAB21H-03-15-	G3/8"	15	1.0	7.5	5.5	
KAB21H-04-08-	G1/2"	8.0	0.5	9	7	
KAB21H-04-15-	G1/2"	15	1.0	7.5	5.5	
KAB21H-06-20-	G3/4"	20	1.0	6.5	5	
KAB21H-08-25-	G1"	25	1.0	5.5	4.5	

- 注 Notes: 1. 使用流体为空气, 水, 瓦斯, 轻油等 Fluid: air, water, gas, light oil, etc.
2. 密封材料可选择NBR, VITON (根据流体及流体温度选择)
Seal material: NBR or VITON (depending on fluid and fluid temperature).
3. 阀体材料可选择铜, 不锈钢SS304 Valve body material: copper or stainless steel SS304.

流体电磁阀 Multiple Fluid Solenoid Valve

直动型2通电磁阀 Direct Operated 2-Port Solenoid Valve



KBS-XC

型号 Model	接管口径 Port Size	通孔直径 Orifice (mm)	最低压差 Min. Differential Pressure (MPa)	最高压差 Max. Differential Pressure (MPa)		切换方式 Operation
				AC	DC	
KBS-06XC-3-	G1/8"	3	0	1.3	1.3	直动式 常闭型 Direct operated, N.C.
KBS-06XC-5-	G1/8"	5	0	0.4	0.25	
KBS-06XC-6-	G1/8"	6	0	0.3	0.2	
KBS-08XC-3-	G1/4"	3	0	1.3	1.3	
KBS-08XC-5-	G1/4"	5	0	0.4	0.25	
KBS-08XC-6-	G1/4"	6	0	0.3	0.2	
KBS-10XC-5-	G3/8"	5	0	0.4	0.25	
KBS-10XC-6-	G3/8"	6	0	0.3	0.2	
KBS-15XC-5-	G1/2"	5	0	0.4	0.25	
KBS-15XC-6-	G1/2"	6	0	0.3	0.2	

注 Notes: 1. 使用流体为空气, 水, 热水, 瓦斯, 轻油等Fluid: air, water, hot water, gas, light oil, etc.
2. 密封材料可选择NBR, VITON, EPDM(根据流体及流体温度选择)
Seal material: NBR, VITON or EPDM (depending on fluid and fluid temperature)
3. 阀体材料可选择铜, 不锈钢SS316Valve body material: copper or stainless steel SS316.

先导型零压差启动式 2通电磁阀 Zero Differential Pressure Pilot Operated 2-Port Solenoid Valve



KWK-XC

型号 Model	接管口径 Port Size	通孔直径 Orifice (mm)	最低压差 Min. Differential Pressure (MPa)	最高压差 Max. Differential Pressure (MPa)		切换方式 Operation
				AC	DC	
KWK10XC-16-	G3/8"	16	0	1.0	0.6	内部先导式 常闭型 Internal pilot operated, N.C. 零压差 Zero pressure difference
KWK15XC-16-	G1/2"	16	0	1.0	0.6	
KWK20XC-20-	G3/4"	20	0	1.0	0.6	
KWK25XC-25-	G1"	25	0	1.0	0.6	
KWK32XC-32-	G1 1/4"	32	0	1.0	0.6	
KWK40XC-40-	G1 1/2"	40	0	1.0	0.6	
KWK50XC-50-	G2"	50	0	1.0	0.6	

注 Notes: 1. 使用流体为空气, 水, 热水, 瓦斯, 轻油等Fluid: air, water, hot water, gas, light oil, etc.
2. 密封材料可选择NBR, VITON, EPDM(根据流体及流体温度选择)
Seal material: NBR, VITON or EPDM (depending on fluid and fluid temperature).
3. 阀体材料可选择铜, 不锈钢SS304Valve body material: copper or stainless steel SS304.
4. 另有常开型可选择Normally open style is available.

先导型2通电磁阀 Pilot Operated 2-Port Solenoid Valve



KGD-XC

型号 Model	接管口径 Port Size	通孔直径 Orifice (mm)	最低压差 Min. Differential Pressure (MPa)	最高压差 Max. Differential Pressure (MPa)		切换方式 Operation
				AC	DC	
KGD10XC-13-	G3/8"	13	0.05	1.6	1.6	先导式 常闭型 Pilot operated, N.C.
KGD15XC-13-	G1/2"	13	0.05	1.6	1.6	
KGD20XC-20-	G3/4"	20	0.05	1.6	1.6	
KGD25XC-25-	G1"	25	0.05	1.6	1.6	
KGD32XC-35-	G1 1/4"	35	0.05	1.6	1.6	
KGD40XC-40-	G1 1/2"	40	0.05	1.6	1.6	
KGD50XC-50-	G2"	50	0.05	1.6	1.6	

注 Notes: 1. 使用流体为空气, 水, 热水, 瓦斯, 轻油等Fluid: air, water, hot water, gas, light oil, etc.
2. 密封材料可选择NBR, VITON, EPDM(根据流体及流体温度选择)
Seal material: NBR, VITON or EPDM (depending on fluid and fluid temperature)
3. 阀体材料可选择铜, 不锈钢SS316Valve body material: copper or stainless steel SS316.
4. 另有常开型可选择Normally open style is available.

角座阀 Angle Seat Valve

2通角座阀 2-Port Angle Seat Valve



KA

型号 Model	结构 Configuration	接管口径 Port Size	通孔直径 Orifice (mm)	Kv (m³/h)	允许压差范围 Permissible differential Pressure (MPa)	控制压力 Control pressure (MPa)	执行器 Actuator (mm)
KA10	单作用常闭 Single acting N.C.	G3/8"	13	4.7	0~1.6	0.3~1.0	50
KA15		G1/2"	13	4.7	0~1.6	0.3~1.0	50
KA20		G3/4"	18	9.5	0~1.6	0.3~1.0	50
KA25		G1"	24	18.1	0~1.6	0.3~1.0	50
KAX25		G1"	24	18.1	0~1.6	0.3~1.0	63
KA32		G1 1/4"	31	23.1	0~1.6	0.3~1.0	63
KA40		G1 1/2"	35	32.9	0~1.6	0.3~1.0	63
KA50		G2"	45	52.8	0~1.0	0.3~1.0	63
KAX50		G2"	45	52.8	0~1.6	0.3~1.0	80
KA65		G2 1/2"	65	90	0~1.0	0.3~1.0	80
KAX65		G2 1/2"	65	90	0~1.6	0.3~1.0	100
KA10D	双作用 (无弹簧) Double acting (without spring)	G3/8"	13	4.7	0~1.6	0~1.0	50
KA15D		G1/2"	13	4.7	0~1.6	0~1.0	50
KA20D		G3/4"	18	9.5	0~1.6	0~1.0	50
KA25D		G1"	24	18.1	0~1.6	0~1.0	50
KAX25D		G1"	24	18.1	0~1.6	0~1.0	63
KA32D		G1 1/4"	31	23.1	0~1.6	0~1.0	63
KA40D		G1 1/2"	35	32.9	0~1.6	0~1.0	63
KA50D		G2"	45	52.8	0~1.0	0~1.0	63
KAX50D		G2"	45	52.8	0~1.6	0~1.0	80
KA65D		G2 1/2"	65	90	0~1.0	0~1.0	80
KAX65D		G2 1/2"	65	90	0~1.6	0~1.0	100
KA10H	单作用常闭 (防水锤) Single acting N.C. (Water hammer resistant)	G3/8"	13	4.7	0~1.6	0.45~1.0	50
KA15H		G1/2"	13	4.7	0~1.6	0.45~1.0	50
KA20H		G3/4"	18	9.5	0~1.2	0.45~1.0	50
KA25H		G1"	24	18.1	0~1.0	0.45~1.0	63
KA32H		G1 1/4"	31	23.1	0~0.6	0.45~1.0	63
KAX32H		G1 1/4"	31	23.1	0~1.2	0.4~1.0	80
KA40H		G1 1/2"	35	32.9	0~1.0	0.4~1.0	80
KAX40H		G1 1/2"	35	32.9	0~1.6	0.4~1.0	100
KA50H		G2"	45	52.8	0~0.6	0.4~1.0	80
KAX50H		G2"	45	52.8	0~1.0	0.4~1.0	100

注Notes: 1. 适用流体为水, 水蒸汽, 中性液体或气体, 酒精, 油, 有机溶剂, 弱酸或者弱碱溶液
Fluid: water, water steam, neutral liquid or gas, alcohol, oil, organic solvent, weak acid or weak base solution.

2. 密封件材质可选: PTFE, RTFESeal material: PTFE, RTFE.

3. 防水锤类型需反向安装, 适用于要求高的防水锤管道
The water hammer resistant type needs to be installed reversely, applied to where water hammer resistance is required.

贴装阀 NAMUR Interface Solenoid Valve / 气动执行器 Pneumatic Actuator

5通贴装阀 NAMUR Interface 5-Port Solenoid Valve



KNVF4130

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
KNVF3130	单线圈 Single	1/4"	18	0.15~1.0	先导型 Pilot operated
KNVF3230	双线圈 Double	1/4"	18	0.2~1.0	
KNVF4130	单线圈 Single	1/4"	32	0.15~1.0	
KNVF4230	双线圈 Double	1/4"	32	0.2~1.0	
KNVF4130-E	单线圈,防爆 Single, explosion-proof	1/4"	32	0.15~1.0	
KNVF4230-E	双线圈,防爆 Double, explosion-proof	1/4"	32	0.2~1.0	

5通贴装阀 NAMUR Interface 5-Port Solenoid Valve



4M310

型号 Model	结构 Configuration	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm²)	工作压力范围 Operating Pressure Range (MPa)	切换方式 Operation
4M110	单线圈 Single	M5, 1/8"	10.0, 12.0	0.15~1.0	先导型 Pilot operated
4M120	双线圈 Double	M5, 1/8"	10.0, 12.0	0.2~1.0	
4M210	单线圈 Single	1/8", 1/4"	14.0, 16.0	0.15~1.0	
4M220	双线圈 Double	1/8", 1/4"	14.0, 16.0	0.2~1.0	
4M310	单线圈 Single	1/4", 3/8"	25.0, 30.0	0.15~1.0	
4M320	双线圈 Double	1/4", 3/8"	25.0, 30.0	0.2~1.0	

气动执行器 Pneumatic Actuator



型号 Model	构造 Structure	接管口径 Port Size	输出扭矩 Output Torque (Nm)	工作压力范围 Operating Pressure Range (MPa)	使用流体 Fluid	摆动角度 Rotation
KT032	齿条和齿轮 Rack and pinion	G1/8"	7.5	0.25~0.8	干燥空气 非腐蚀性 气体轻油 Dry air, non- corrosive gas, light oil	90°
KT052		G1/4"	20.8	0.25~0.8		
KT063		G1/4"	36.6	0.25~0.8		
KT075		G1/4"	58.8	0.25~0.8		
KT083		G1/4"	74.2	0.25~0.8		
KT092		G1/4"	113.7	0.25~0.8		
KT105		G1/4"	169.7	0.25~0.8		
KT125		G1/4"	291.5	0.25~0.8		
KT140		G1/4"	438.7	0.25~0.8		
KT160		G1/4"	668.5	0.25~0.8		
KT190		G1/4"	1077.4	0.25~0.8		
KT210		G1/4"	1480.6	0.25~0.8		
KT240		G3/8"	2320.8	0.25~0.8		
KT270		G1/2"	3263.6	0.25~0.8		

注Notes: 1. 有双作用和单作用(弹簧压回)可选Double acting and single acting (spring return) are available.
2. 直接安装于适用阀门, 用于推动阀门的开关Directly install on and drive applicable valves.
3. 表格中的输出扭矩为压力在0.5MPa时双作用执行器的输出扭矩
Output torque is for double acting style at 0.5 MPa pressure.

微型气缸 Miniature Air Cylinder

微型气缸 Miniature Air Cylinder GSP (Ø4~Ø6)



缸径	Bore (mm)	4	6
行程	Stroke (mm)	5 10 15	5 10 15
接管口径	Port Size Rc(PT)	适用气管U0425 Fit tubing U0425	M5×0.8
动作形式	Action	单动(弹簧压回) Single acting (Spring return)	
流体	Fluid	过滤压缩空气 Filtered compressed air	
环境及流体温度	Ambient and Fluid Temperature	5~60°C	
工作压力范围	Operating Pressure (MPa)	0.3~0.7	
保证耐压力	Proof Pressure (MPa)	1.0	
缓冲	Cushion	无 None	

微型气缸 Miniature Air Cylinder KCJP (Ø4~Ø15)



缸径	Bore (mm)	4	6	10	15
行程	Stroke (mm)	5 10 15			
接管口径	Port Size Rc(PT)	M5×0.8			
动作形式	Action	单动(弹簧压回) Single acting (Spring return)			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.3~0.7	0.2~0.7	0.15~0.7	
保证耐压力	Proof Pressure (MPa)	1.0			
缓冲	Cushion	无 None			

微型气缸 Miniature Air Cylinder KCJP2 (Ø4~Ø16)



缸径	Bore (mm)	4	6	10	16
行程	Stroke (mm)	5~20	5~25	5~40	5~40
接管口径	Port Size Rc(PT)	M3×0.5			M5×0.8
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.15~0.7	0.12~0.7	0.06~0.7	
保证耐压力	Proof Pressure (MPa)	1.0			
缓冲	Cushion	橡胶缓冲 Rubber bumper			

标准微型气缸 Standard Miniature Air Cylinder KCJ2 (Ø10~Ø16)



缸径	Bore (mm)	10	16
标准行程	Standard Stroke (mm)	15~150	15~200
接管口径	Port Size Rc(PT)	M5×0.8	
动作形式	Action	双动, 单动 Double acting, single acting	
流体	Fluid	过滤压缩空气 Filtered compressed air	
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)	
工作压力范围	Operating Pressure (MPa)	0.06~0.7	
保证耐压力	Proof Pressure (MPa)	1.0	
活塞速度	Piston Speed	50~750 mm/s	
缓冲	Cushion	橡胶缓冲 Rubber bumper	

标准气缸 Standard Air Cylinder

小型气缸 Small Bore Size Air Cylinder KCM2 (Ø20~Ø40)



缸径	Bore (mm)	20	25	32	40
标准行程	Standard Stroke (mm)	25~300			
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/4"
动作形式	Action	双动, 单动 Double acting, single acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.05~1.0			
保证耐压力	Proof Pressure (MPa)	1.5			
活塞速度	Piston Speed	50~750 mm/s			
缓冲	Cushion	橡胶缓冲 Rubber bumper, 气缓冲 Air cushion			

小型气缸/直接安装 Small Bore Size Air Cylinder/ Direct Mount KCM2R (Ø20~Ø40)



缸径	Bore (mm)	20	25	32	40
标准行程	Standard Stroke (mm)	25~150	25~200	25~300	
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/4"
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.05~1.0			
保证耐压力	Proof Pressure (MPa)	1.5			
活塞速度	Piston Speed	50~500 mm/s			
缓冲	Cushion	橡胶缓冲 Rubber bumper			

轻巧型气缸 Light Air Cylinder KCG1 (Ø20~Ø63)



缸径	Bore (mm)	20	25	32	40	50	63
标准行程	Standard Stroke (mm)	25~200	25~300	25~300	25~300	25~300	25~300
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"
动作形式	Action	双动 Double Acting					
流体	Fluid	洁净空气 Clean Air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.05~1.0					
保证耐压力	Proof Pressure (MPa)	1.5					
活塞速度	Piston Speed	50~500 mm/s					
缓冲	Cushion	橡胶缓冲 Rubber bumper					

标准气缸 Standard Air Cylinder

ISO6432标准气缸 ISO6432 Air Cylinder KC85 (Ø8~Ø25)



缸径		Bore (mm)	8	10	12	16	20	25
标准行程	单动 Single acting	Standard Stroke (mm)	-	-	-	15~100	15~150	15~150
	双动 Double acting		10~100	10~100	10~200	15~500	15~500	15~500
接管口径		Port Size	M5×0.8	M5×0.8	M5×0.8	M5×0.8	G1/8"	G1/8"
动作形式		Action	双动 Double acting			双动, 单动 Double acting, single acting		
流体		Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度		Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围		Operating Pressure (MPa)	0.05~1.0					
保证耐压力		Proof Pressure (MPa)	1.5					
活塞速度		Piston Speed	50~500 mm/s					
缓冲		Cushion	橡胶缓冲 Rubber bumper, 气缓冲 Air cushion					

不锈钢气缸 Stainless Steel Air Cylinder MA (Ø16~Ø63)



缸径	Bore (mm)	16	20	25	32	40	50	63
标准行程	Standard Stroke (mm)	25~500						
接管口径	Port Size Rc(PT)	M5x0.8	1/8"				1/4"	
动作形式	Action	双动, 单动 Double acting, single acting						
流体	Fluid	过滤压缩空气 Filtered compressed air						
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)						
工作压力范围	Operating Pressure (MPa)	0.1~1.0 (双动 Double acting)						
保证耐压力	Proof Pressure (MPa)	1.5						
活塞速度	Piston Speed	50~800 mm/s (双动 Double acting)						
缓冲	Cushion	橡胶缓冲 Rubber bumper						

小型气缸 Small Bore Size Air Cylinder MAL (Ø20~Ø40)



缸径	Bore (mm)	20	25	32	40
标准行程	Standard Stroke (mm)	25~500			
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/4"
动作形式	Action	双动, 单动 Double acting, single acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.1~1.0 (双动 Double acting)			
保证耐压力	Proof Pressure (MPa)	1.5			
活塞速度	Piston Speed	50~800 mm/s (双动 Double acting)			
缓冲	Cushion	橡胶缓冲 Rubber bumper			

标准气缸 Standard Air Cylinder

中型气缸 Medium Bore Size Air Cylinder KMB (Ø40~Ø100)



缸径	Bore (mm)	40	50	63	80	100
标准行程	Standard Stroke (mm)	25~500	25~600	25~600	25~800	25~800
接管口径	Port Size Rc(PT)	1/4"	1/4"	3/8"	3/8"	1/2"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.05~1.0				
保证耐压力	Proof Pressure (MPa)	1.5				
活塞速度	Piston Speed	50~1000 mm/s				
缓冲	Cushion	气缓冲 Air cushion				

中型气缸 Medium Bore Size Air Cylinder KCA1 (Ø40~Ø100)



缸径	Bore (mm)	40	50	63	80	100
标准行程	Standard Stroke (mm)	25~500	25~600	25~600	25~800	25~800
接管口径	Port Size Rc(PT)	1/4"	3/8"	3/8"	1/2"	1/2"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.05~1.0				
保证耐压力	Proof Pressure (MPa)	1.5				
活塞速度	Piston Speed	50~700 mm/s				
缓冲	Cushion	气缓冲 Air cushion				

注: 可定制耐高温气缸, 温度达150°C.
Note: Heat resistance to 150°C temperature is available.

大型气缸 Large Bore Size Air Cylinder KCS1 (Ø125~Ø400)



缸径	Bore (mm)	125	140	160	180	200	250	300	350	400
标准行程	Standard Stroke (mm)	25~1200								
接管口径	Port Size Rc(PT)	1/2"	1/2"	3/4"	3/4"	3/4"	1"	1"	1 1/4"	1 1/4"
动作形式	Action	双动 Double acting								
流体	Fluid	过滤压缩空气 Filtered compressed air								
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)								
工作压力范围	Operating Pressure (MPa)	0.08~1.0								
保证耐压力	Proof Pressure (MPa)	1.5								
活塞速度	Piston Speed	50~500 mm/s								
缓冲	Cushion	气缓冲 Air cushion								
缸筒材质	Material of Barrel	铝合金 Aluminium alloy			铝合金或碳钢 Aluminium alloy or Carbon steel		碳钢 Carbon steel			

注: 碳钢缸筒不适配磁性开关
Note: The carbon steel barrel is not applicable for auto switch.

标准气缸 Standard Air Cylinder

中型气缸 Medium Bore Size Air Cylinder SU (Ø32~Ø100)



缸径	Bore (mm)	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	25~500	25~1000				
接管口径	Port Size Rc(PT)	1/8"	1/4"	1/4"	3/8"	3/8"	1/2"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.1~1.0					
保证耐压力	Proof Pressure (MPa)	1.5					
活塞速度	Piston Speed	30~800 mm/s					
缓冲	Cushion	可调缓冲 Adjustable cushion					

中型气缸 Medium Bore Size Air Cylinder SC (Ø32~Ø100)



缸径	Bore (mm)	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	25~500	25~1000				
接管口径	Port Size Rc(PT)	1/8"	1/4"	1/4"	3/8"	3/8"	1/2"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.1~1.0					
保证耐压力	Proof Pressure (MPa)	1.5					
活塞速度	Piston Speed	30~800 mm/s					
缓冲	Cushion	可调缓冲 Adjustable cushion					

大型气缸 Large Bore Size Air Cylinder SC (Ø125~Ø250)



缸径	Bore (mm)	125	160	200	250
标准行程	Standard Stroke (mm)	25~1000			
接管口径	Port Size Rc(PT)	1/2"	3/4"	3/4"	1"
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.1~1.0			
保证耐压力	Proof Pressure (MPa)	1.5			
活塞速度	Piston Speed	30~500 mm/s			
缓冲	Cushion	可调缓冲 Adjustable cushion			

ISO1552标准气缸 ISO1552 Air Cylinder SI (Ø32~Ø200)



缸径	Bore (mm)	32	40	50	63	80	100	125	160	200
标准行程	Standard Stroke (mm)	25~500	25~800	25~1000						
接管口径	Port Size Rc(PT)	1/8"	1/4"	1/4"	3/8"	3/8"	1/2"	1/2"	3/4"	3/4"
动作形式	Action	双动 Double acting								
流体	Fluid	过滤压缩空气 Filtered compressed air								
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)								
工作压力范围	Operating Pressure (MPa)	0.1~1.0								
保证耐压力	Proof Pressure (MPa)	1.5								
活塞速度	Piston Speed	30~800 mm/s							30~500 mm/s	
缓冲	Cushion	可调缓冲 Adjustable cushion								

标准气缸 Standard Air Cylinder

ISO15552标准带锁气缸 ISO15552 Lock Air Cylinder SIL (Ø32~Ø200)



缸径	Bore (mm)	40	50	63	80	100	125	160	200
标准行程	Standard Stroke (mm)	25~800	25~1000						
接管口径	Port Size Rc(PT)	1/4"	1/4"	3/8"	3/8"	1/2"	1/2"	3/4"	3/4"
动作形式	Action	双动 Double acting							
流体	Fluid	过滤压缩空气 Filtered compressed air							
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)							
工作压力范围	Operating Pressure (MPa)	0.1~1.0							
保证耐压力	Proof Pressure (MPa)	1.5							
活塞速度	Piston Speed	30~800 mm/s						30~500 mm/s	
缓冲	Cushion	可调缓冲 Adjustable cushion							

ISO15552标准气缸 ISO15552 Air Cylinder KCP95 (Ø32~Ø125)



缸径	Bore (mm)	32	40	50	63	80	100	125
标准行程	Standard Stroke (mm)	25~500	25~500	25~600	25~600	25~800	25~800	25~800
接管口径	Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"
动作形式	Action	双动 Double acting						
流体	Fluid	过滤压缩空气 Filtered compressed air						
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)						
工作压力范围	Operating Pressure (MPa)	0.05~1.0						
保证耐压力	Proof Pressure (MPa)	1.5						
活塞速度	Piston Speed	50~1000 mm/s						
缓冲	Cushion	气缓冲 Air cushion						

ISO15552标准气缸 ISO15552 Air Cylinder KC95 (Ø160~Ø320)



缸径	Bore (mm)	160	200	250	320
标准行程	Standard Stroke (mm)	25~1500			
接管口径	Port Size	G3/4"	G3/4"	G1"	G1"
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.1~0.9			
保证耐压力	Proof Pressure (MPa)	1.35			
活塞速度	Piston Speed	50~800 mm/s			
缓冲	Cushion	气缓冲 Air cushion			

注: Ø320不适配磁性开关
Note: Ø320 is not applicable for auto switch.

薄型气缸 Compact Air Cylinder

ISO21287薄型气缸 ISO21287 Compact Air Cylinder ADN/AEN (Ø12~Ø100)



缸径	Bore (mm)	12	16	20	25	32	40	50	63	80	100	125
标准行程	Standard Stroke (mm)	5~50	5~75	5~100	5~150	5~200	5~250				5~300	
接管口径	Port Size	M5×0.8				G1/8"				G1/4"		
动作形式	Action	双动, 单动 Double acting, single acting										
流体	Fluid	过滤压缩空气 Filtered compressed air										
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)										
工作压力范围	Operating Pressure (MPa)	0.1~1.0 (双动 Double acting) 0.2~1.0 (单动 Single acting)										
保证耐压力	Proof Pressure (MPa)	1.5										
活塞速度	Piston Speed (mm/s)	30~500 mm/s (双动 Double acting) 50~500 mm/s (单动 Single acting)										
缓冲	Cushion	橡胶缓冲 Rubber bumper, 气缓冲 Air cushion										

薄型气缸 Compact Air Cylinder KCQ2 (Ø12~Ø100)



缸径	Bore (mm)	12	16	20	25	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	5~30	5~50	5~100	10~100						
长行程	Long Stroke(mm)	-				125~300					
接管口径	Port Size Rc(PT)	M5×0.8				1/8"	1/4"	3/8"			
动作形式	Action	双动, 单动 Double acting, single acting									
流体	Fluid	过滤压缩空气 Filtered compressed air									
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)									
工作压力范围	Operating Pressure (MPa)	0.05~1.0									
保证耐压力	Proof Pressure (MPa)	1.5									
活塞速度	Piston Speed	50~500 mm/s									
缓冲	Cushion	橡胶缓冲 Rubber bumper									

大缸径薄型气缸 Large Bore Size Compact Air Cylinder KCQ2 (Ø125~Ø200)



缸径	Bore (mm)	125	140	160	200
标准行程	Standard Stroke (mm)	10~300			
接管口径	Port Size Rc(PT)	3/8"			1/2"
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.05~1.0			0.05~0.7
保证耐压力	Proof Pressure (MPa)	1.5			1.05
活塞速度	Piston Speed	50~500 mm/s			20~400 mm/s
缓冲	Cushion	橡胶缓冲 Rubber bumper			

薄型气缸 Compact Air Cylinder SDA (Ø12~Ø100)



缸径	Bore (mm)	12	16	20	25	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	5~60	5~100	5~130							
接管口径	Port Size Rc(PT)	M5×0.8				1/8"	1/4"	3/8"			
动作形式	Action	双动, 单动 Double acting, single acting									
流体	Fluid	过滤压缩空气 Filtered compressed air									
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)									
工作压力范围	Operating Pressure (MPa)	0.1~1.0 (双动 Double acting)									
保证耐压力	Proof Pressure (MPa)	1.5									
活塞速度	Piston Speed	30~500 mm/s (双动 Double acting)									
缓冲	Cushion	橡胶缓冲 Rubber bumper									

导杆气缸 Guide Air Cylinder

导杆型薄型气缸 Guide Compact Air Cylinder KCQM (Ø12~Ø100)



缸径	Bore (mm)	12	16	20	25	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	5~30		5~50		5~100		10~100			
接管口径	Port Size Rc(PT)	M5×0.8				1/8"		1/4"		3/8"	
动作形式	Action	双动 Double acting									
流体	Fluid	过滤压缩空气 Filtered compressed air									
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)									
工作压力范围	Operating Pressure (MPa)	0.12~1.0				0.1~1.0					
保证耐压力	Proof Pressure (MPa)	1.5									
活塞速度	Piston Speed	50~500 mm/s						50~300 mm/s			
缓冲	Cushion	橡胶缓冲 Rubber bumper									
杆不回转精度	Rod Non-rotating Accuracy	± 0.2°				± 0.1°					

导杆气缸 Guide Air Cylinder KMGI (Ø6, Ø10)



缸径	Bore (mm)	6	10
标准行程	Standard Stroke (mm)	5 10 15	5 10 15 20
接管口径	Port Size Rc(PT)	M3x0.5	
动作形式	Action	双动 Double acting	
流体	Fluid	过滤压缩空气 Filtered compressed air	
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)	
工作压力范围	Operating Pressure (MPa)	0.15~0.7	
保证耐压力	Proof Pressure (MPa)	1.05	
活塞速度	Piston Speed	50~500 mm/s	
缓冲	Cushion	橡胶缓冲 Rubber bumper	

导杆气缸 Guide Air Cylinder KMGP/L (Ø12~Ø63)



缸径	Bore (mm)	12	16	20	25	32	40	50	63
标准行程	Standard Stroke (mm)	10~100		20~200			25~200		
接管口径	Port Size Rc(PT)	M5×0.8		1/8"	1/8"	1/8"	1/8"	1/4"	1/4"
动作形式	Action	双动 Double acting							
流体	Fluid	过滤压缩空气 Filtered compressed air							
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)							
工作压力范围	Operating Pressure (MPa)	0.1~1.0							
保证耐压力	Proof Pressure (MPa)	1.5							
活塞速度	Piston Speed	50~500 mm/s							
缓冲	Cushion	橡胶缓冲 Rubber bumper							

导杆气缸 Guide Air Cylinder KMGM/L (Ø20~Ø100)



缸径	Bore (mm)	20	25	32	40	50	63	80	100
标准行程	Standard Stroke (mm)	75~200		75~300					
长行程	Long Stroke (mm)	~400	~500	~600	~800	~1000	~1100	~1200	~1300
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"	3/8"	1/2"
动作形式	Action	双动 Double acting							
流体	Fluid	过滤压缩空气 Filtered compressed air							
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)							
工作压力范围	Operating Pressure (MPa)	0.15~1.0							
保证耐压力	Proof Pressure (MPa)	1.5							
活塞速度	Piston Speed	50~500 mm/s							
缓冲 (基本气缸)	Cushion (Basic Cylinder)	橡胶缓冲 Rubber bumper							
缓冲 (导杆部分)	Cushion (Guide Unit)	内置油压缓冲器(2个) Built-in shock absorbers (2 pcs.)							

双缸气缸 Dual Rod Air Cylinder

薄型双缸气缸 Compact Dual Rod Air Cylinder KCXSJM/L (Ø6~Ø32)



缸径	Bore (mm)	6	10	15	20	25	32
标准行程	Standard Stroke (mm)	10~50	10~75	10~100	10~100	10~100	10~100
接管口径	Port Size Rc(PT)	M3x0.5	M5×0.8	M5×0.8	M5×0.8	M5×0.8	1/8"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.15~0.7	0.1~0.7		0.05~0.7		
保证耐压力	Proof Pressure (MPa)	1.05					
活塞速度	Piston Speed	30~800 mm/s		30~700 mm/s		30~600 mm/s	
缓冲	Cushion	橡胶缓冲 Rubber bumper					

双缸气缸 Dual Rod Air Cylinder KCXSM/L (Ø10~Ø32)



缸径	Bore (mm)	10	15	20	25	32
标准行程	Standard Stroke (mm)	10~75	10~100	10~100	10~100	10~100
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	1/8"	1/8"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.1~0.7		0.05~0.7		
保证耐压力	Proof Pressure (MPa)	1.0				
活塞速度	Piston Speed	30~600 mm/s				
缓冲	Cushion	橡胶缓冲 Rubber bumper				

双出杆双缸气缸 Dual Rod Air Cylinder /Double Rod KCXSW (Ø10~Ø25)



缸径	Bore (mm)	10	15	20	25
标准行程	Standard Stroke (mm)	10~100	10~150	10~150	10~150
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	1/8"
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.15~0.7		0.1~0.7	
保证耐压力	Proof Pressure (MPa)	1.0			
活塞速度	Piston Speed	50~500 mm/s			
缓冲	Cushion	橡胶缓冲 Rubber bumper			

双缸气缸 Dual Rod Air Cylinder TN (Ø10~Ø32)



缸径	Bore (mm)	10	16	20	25	32
标准行程	Standard Stroke (mm)	10~100	10~200	10~200	10~200	10~200
接管口径	Port Size Rc(PT)	M5x0.8	M5x0.8	M5x0.8	M5x0.8	1/8"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.1~1.0				
保证耐压力	Proof Pressure (MPa)	1.5				
活塞速度	Piston Speed	30~500 mm/s				
缓冲	Cushion	橡胶缓冲 Rubber bumper				
调整行程	Adjustable Stroke (mm)	-10~0				
杆不回转精度	Rod Non-rotating Accuracy	± 0.4°	± 0.3°			

气缸 Air Cylinder

小型自由安装气缸 Mini Free Mount Air Cylinder KCUJ (Ø6~Ø20)



缸径	Bore (mm)	6	8	10	12	16	20
标准行程 (双动)	Standard Stroke (mm) (Double Acting)	4~30	4~30	4~30	5~30	5~30	5~50
接管口径	Port Size Rc(PT)	M3×0.5	M3×0.5	M3×0.5	M3×0.5	M3×0.5	M5×0.8
动作形式	Action	双动, 单动 Double acting, single acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.3~0.7	0.3~0.7	0.2~0.7	0.25~0.7	0.25~0.7	0.18~0.7
保证耐压力	Proof Pressure (MPa)	1.05					
活塞速度	Piston Speed	50~500 mm/s					
缓冲	Cushion	橡胶缓冲 Rubber bumper					

自由安装气缸 Free Mount Air Cylinder KCU (Ø6~Ø32)



缸径	Bore (mm)	6	10	16	20	25	32
标准行程 (双动)	Standard Stroke (mm) (Double Acting)	5~60	5~60	5~60	5~100	5~100	5~100
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	M5×0.8	M5×0.8	1/8"
动作形式	Action	双动, 单动 Double acting, single acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.05~0.7					
保证耐压力	Proof Pressure (MPa)	1.05					
活塞速度	Piston Speed	50~500 mm/s					
缓冲	Cushion	橡胶缓冲 Rubber bumper					

平板式气缸 Plate Air Cylinder KMUB (Ø25~Ø63)



缸径	Bore (mm)	25	32	40	50	63
标准行程	Standard Stroke (mm)	5~300				
接管口径	Port Size Rc(PT)	M5x0.8	1/8"	1/8"	1/4"	1/4"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.05~0.7				
保证耐压力	Proof Pressure (MPa)	1.05				
活塞速度	Piston Speed	50~500 mm/s				
杆不回转精度	Rod Non-rotating Accuracy	±1°	±0.8°	±0.5°	±0.5°	±0.5°
缓冲	Cushion	橡胶缓冲 Rubber bumper				

气缸 Air Cylinder

旋转气缸 (齿轮齿条式) Rotary Table (Rack & Pinion Style) KMSQB (10~200)



尺寸	Size (mm)	10	20	30	50	70	100	200
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	1/8"	1/8"	1/8"	1/8"	1/8"
活塞直径	Piston Diameter (mm)	15	18	21	25	28	32	40
流体	Fluid	过滤压缩空气 Filtered compressed air						
环境及流体温度	Ambient and Fluid Temperature	0~60°C (未凝结 No condensation)						
工作压力范围	Operating Pressure (MPa) 调整螺丝 Adjusting bolt/ 油压缓冲器 Shock absorber	0.1~1.0/ 0.1~0.6						
旋转角度范围	Rotation Angle Range	0°~190°						
缓冲	Cushion 调整螺丝 Adjusting bolt/ 油压缓冲器 Shock absorber	橡胶缓冲 Rubber bumper/ 油压缓冲器 Shock absorber						

叶片式摆动气缸 Vane Type Rotary Actuator KCRB2 (10~40)



尺寸	Size (mm)	10	15	20	30	40
接管口径	Port Size Rc(PT)	M3×0.5			M5×0.8	
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	5~60℃				
工作压力范围	Operating Pressure (MPa)	0.2~0.7	0.15~0.7		0.15~1.0	
摆动角度	Rotating Angle	单叶片式 Single Vane Type		90°, 180°, 270°		
		双叶片式 Double Vane Type		90°, 100°		

旋转夹紧气缸 Rotary Clamp Air Cylinder KMK (Ø12~Ø63)



缸径	Bore (mm)	12	16	20	25	32	40	50	63
夹紧行程	Clamp Stroke (mm)	10, 20, 30				10, 20, 30, 50			
回转行程	Rotary Stroke (mm)	7.5	9.5		15		19		
回转角度	Rotary Angle	90°±10°							
回转方向	Rotary Direction	L: 逆时针左旋 Counterclockwise, R: 顺时针右旋 Clockwise							
接管口径	Port Size Rc(PT)	M5×0.8				1/8"		1/4"	
动作形式	Action	双动 Double acting							
流体	Fluid	过滤压缩空气 Filtered compressed air							
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)							
工作压力范围	Operating Pressure (MPa)	0.1~1.0						0.1~0.6	
保证耐压力	Proof Pressure (MPa)	1.5							
活塞速度	Piston Speed	50~200 mm/s							
杆不回转精度	Rod Non-rotating Accuracy	±1.4°	±1.2°		±0.9°		±0.7°		
缓冲	Cushion	橡胶缓冲 Rubber bumper							

转角气缸 Rotary Clamp Air Cylinder ACK (Ø25~Ø63)



缸径	Bore (mm)	25	32	40	50	63
总行程	Total Stroke (mm)	26		27	29	
回转角度	Rotary Angle	90°, 180°				
回转方向	Rotary Direction	L: 逆时针左旋 Counterclockwise, R: 顺时针右旋 Clockwise				
接管口径	Port Size Rc(PT)	M5×0.8	1/8"			
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.15~1.0				
保证耐压力	Proof Pressure (MPa)	1.5				
活塞速度	Piston Speed	50~200 mm/s				

无杆气缸 Rodless Air Cylinder

磁耦式无杆气缸 Magnetically Coupled Rodless Air Cylinder KCY3B (Ø15~Ø40)




缸径	Bore (mm)	15	20	25	32	40
标准行程	Standard Stroke (mm)	50~500	100~800			100~1000
接管口径	Port Size Rc(PT)	M5×0.8	1/8"			1/4"
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.16~0.7	0.15~0.7			
保证耐压力	Proof Pressure (MPa)	1.05				
磁性保持力	Magnet Holding Force (N)	137	231	363	588	922
活塞速度	Piston Speed	50~500 mm/s				
缓冲	Cushion	橡胶缓冲 Rubber bumper				

磁耦式无杆气缸 (直接安装) Magnetically Coupled Rodless Air Cylinder (Direct Mounting) KCY3R (Ø6~Ø63)



缸径	Bore (mm)	6	10	15	20	25	32	40	50	63
标准行程	Standard Stroke (mm)	50~200	50~300	50~500	100~800				100~1000	
接管口径	Port Size Rc(PT)	M3x0.5	M5x0.8		1/8"				1/4"	
动作形式	Action	双动 Double acting								
流体	Fluid	过滤压缩空气 Filtered compressed air								
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)								
工作压力范围	Operating Pressure (MPa)	0.16~0.7			0.15~0.7	0.14~0.7	0.12~0.7			
保证耐压力	Proof Pressure (MPa)	1.05								
磁性保持力	Magnet Holding Force (N)	19.6	53.9	137	231	363	588	922	1471	2256
活塞速度	Piston Speed	50~500 mm/s								
缓冲	Cushion	橡胶缓冲 Rubber bumper								

磁耦式无杆气缸 (滑动轴承) Magnetically Coupled Rodless Air Cylinder (Slide Bearing) KCY1S (Ø6~Ø40)



缸径	Bore (mm)	6	10	15	20	25	32	40
标准行程	Standard Stroke (mm)	50~200	50~300	50~500	100~800			100~1000
接管口径	Port Size Rc(PT)	M3x0.5	M5x0.8		1/8"			1/4"
动作形式	Action	双动 Double acting						
流体	Fluid	过滤压缩空气 Filtered compressed air						
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)						
工作压力范围	Operating Pressure (MPa)	0.18~0.7						
保证耐压力	Proof Pressure (MPa)	1.05						
磁性保持力	Magnet Holding Force (N)	19.6	53.9	137	231	363	588	922
活塞速度	Piston Speed	50~400 mm/s						
缓冲	Cushion	橡胶缓冲 Rubber bumper						

滑台气缸 Air Slide Table

滑台气缸 (交叉滚柱导轨) Air Slide Table (Cross Roller Guide) KMXS (Ø6~Ø25)



缸径	Bore (mm)	6	8	12	16	20	25
标准行程	Standard Stroke (mm)	10~50	10~75	10~100	10~125	10~150	10~150
接管口径	Port Size Rc(PT)	M3×0.5	M5×0.8	M5×0.8	M5×0.8	1/8"	1/8"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.15~0.7					
保证耐压力	Proof Pressure (MPa)	1.05					
活塞速度	Piston Speed	50~500 mm/s					
缓冲	Cushion	橡胶缓冲(标准) Rubber bumper (Standard), 油压缓冲器(可选) Shock absorber (Option)					

滑台气缸 (小型) Air Slide Table (Compact) KMXH (Ø6~Ø20)



缸径	Bore (mm)	6	10	16	20
标准行程	Standard Stroke (mm)	5~60			
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	M5×0.8
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
最低使用压力	Min. Operating Pressure (MPa)	0.15	0.06	0.05	
最高使用压力	Max. Operating Pressure (MPa)	0.7			
保证耐压力	Proof Pressure (MPa)	1.05			
活塞速度	Piston Speed	50~500 mm/s			
缓冲	Cushion	橡胶缓冲 Rubber bumper			

滑台气缸 (循环直线导轨) Air Slide Table (Recirculating Linear Guide) KMXQ (Ø6~Ø25)



缸径	Bore (mm)	6	8	12	16	20	25
标准行程	Standard Stroke (mm)	10~50	10~75	10~100	10~125	10~150	10~150
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	M5×0.8	1/8"	1/8"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
工作压力范围	Operating Pressure (MPa)	0.15~0.7					
保证耐压力	Proof Pressure (MPa)	1.05					
活塞速度	Piston Speed	50~500 mm/s					
缓冲	Cushion	橡胶缓冲(标准) Rubber bumper (Standard), 油压缓冲器(可选) Shock absorber (Option)					

角度开闭气爪 Angular Style Air Gripper KMHC2 (Ø10~Ø25)



缸径	Bore (mm)	10	16	20	25
开闭角度	Opening/Closing Angle	-10°~30°			
接管口径	Port Size Rc(PT)	M3×0.5	M5×0.8	M5×0.8	M5×0.8
动作形式	Action	双动, 单动 Double acting, single acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	双动 Double acting	0.1~0.6		
		单动 Single acting	0.25~0.6		
最高动作频率	Max. Operating Frequency	180 c.p.m.			

角度开闭气爪 Angular Style Air Gripper KMHC2M (Ø12~Ø32)



缸径	Bore (mm)	12	16	20	25	32
开闭角度	Opening/Closing Angle	-10°~30°				
接管口径	Port Size Rc(PT)	M3×0.5	M5×0.8	M5×0.8	M5×0.8	M5×0.8
动作形式	Action	双动 Double acting				
流体	Fluid	过滤压缩空气 Filtered compressed air				
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)				
工作压力范围	Operating Pressure (MPa)	0.15~0.7				
最高动作频率	Max. Operating Frequency	180 c.p.m.				

180°角度开闭气爪 180° Angular Style Air Gripper KMHY2 (Ø10~Ø25)



缸径	Bore (mm)	10	16	20	25
开闭角度	Opening/Closing Angle	-3°~180°			
接管口径	Port Size Rc(PT)	M5×0.8			
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
工作压力范围	Operating Pressure (MPa)	0.1~0.6			
最高动作频率	Max. Operating Frequency	60 c.p.m.			

平行开闭气爪 Parallel Style Air Gripper KMHZ2 (Ø6~Ø40)



缸径	Bore (mm)	6	10	16	20	25	32	40
开闭行程	Stroke (mm)	4	4	6	10	14	22	30
接管口径	Port Size Rc(PT)	M3×0.5	M3×0.5	M5×0.8	M5×0.8	M5×0.8	M5×0.8	M5×0.8
动作形式	Action	双动, 单动 Double acting, single acting						
流体	Fluid	过滤压缩空气 Filtered compressed air						
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)						
工作压力范围	Operating Pressure (MPa)	双动 Double acting 0.2~0.7			双动 Double acting: 0.1~0.7			
		单动 Single acting 0.35~0.7			单动 Single acting: 0.25~0.7			
最高动作频率	Max. Operating Frequency	180 c.p.m.						60 c.p.m.
重复精度	Repeatability	±0.01						±0.02

气爪 Air Gripper

平行开闭 三爪气爪 3-Finger Parallel Style Air Gripper KMHS3 (Ø16~Ø125)



缸径	Bore (mm)	16	20	25	32	40	50	63	80	100	125
开闭行程	Stroke (mm)	4	4	6	8	8	12	16	20	24	32
*有效夹持力	Effective Gripping Force (N)	开侧 External	14	25	42	74	118	187	335	500	1270
		闭侧 Internal	16	28	47	82	130	204	359	525	780
接管口径	Port Size Rc(PT)	M3×0.5	M5×0.8						1/8"	1/4"	3/8"
动作形式	Action	双动 Double acting									
流体	Fluid	过滤压缩空气 Filtered compressed air									
环境及流体温度	Ambient and Fluid Temperature	-5~60℃ (未冻结 No freezing)									
工作压力范围	Operating Pressure (MPa)	0.2~0.6				0.1~0.6					
最高动作频率	Max. Operating Frequency	120 c.p.m.				60 c.p.m.				30 c.p.m.	
重复精度	Repeatability	±0.01									

*注: 压力0.5 MPa, 夹持点在距离L=20 mm (Ø16~Ø25), L=30 mm (Ø32~Ø63), L=50 mm (Ø80~Ø125)时的数值
 *Note: Measuring when pressure at 0.5 MPa and gripping point L=20 mm (Ø16~Ø25), L=30 mm (Ø32~Ø63), L=50 mm (Ø80~Ø125).

宽型气爪 Wide Opening Air Gripper KMHL2 (Ø10~Ø40)



缸径	Bore (mm)	10	16	20	25	32	40
开闭行程	Stroke (mm)	20 40 60	30 60 80	40 80 100	50 100 120	70 120 160	100 160 200
闭合宽度	Closed Width (mm)	56 78 96	68 110 130	82 142 162	100 182 200	150 198 242	188 246 286
打开宽度	Open Width (mm)	76 117 156	98 170 210	122 222 262	150 282 320	220 318 402	288 406 486
接管口径	Port Size Rc(PT)	M5×0.8	M5×0.8	M5×0.8	M5×0.8	1/8"	1/8"
动作形式	Action	双动 Double acting					
流体	Fluid	过滤压缩空气 Filtered compressed air					
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)					
使用压力范围	Operating Pressure (MPa)	0.15~0.6	0.1~0.6				
最高动作频率	Max. Operating Frequency (c.p.m.)	60 40 40	60 40 40	60 40 40	60 40 40	30 20 20	30 20 20
重复精度	Repeatability	±0.01					

薄型气爪 Low Profile Air Gripper KMHF2 (Ø8~Ø20)



缸径	Bore (mm)	8	12	16	20
开闭行程	Stroke (mm)	8 16 32	12 24 48	16 32 64	20 40 80
接管口径	Port Size Rc(PT)	M3×0.5	M5×0.8	M5×0.8	M5×0.8
动作形式	Action	双动 Double acting			
流体	Fluid	过滤压缩空气 Filtered compressed air			
环境及流体温度	Ambient and Fluid Temperature	-5~60°C (未冻结 No freezing)			
使用压力范围	Operating Pressure (MPa)	0.15~0.7	0.1~0.7		
最高动作频率	Max. Operating Frequency (c.p.m.)	120 120 60	120 120 60	120 120 60	120 120 60
重复精度	Repeatability	±0.05			

气缸附件 Cylinder Auxiliaries

磁性开关 Auto Switches D-M9BK



适用气缸

Applicable Cylinders

KCJP2, KCJ2, KCM2, KCM2R, KC85, MA, MAL, KCG1, KMB, KCA1, KCS1, SC, SU, KCP95, KC95, SI, SIL, KCQ2 (Ø12~Ø100), KCQ2 (Ø140~Ø200), ADN/AEN, KCQM, KMGPM/L, KMGGM/L, KCXSJM/L, KCXSM/L, KCXSW, KCU, KMUB (ST>10 mm), KCY3R, KCY1S, KMXS, KMXQ, KMXH, KMSQB, KCRB2, KMK, KMHC2, KMHC2M, KMHY2, KMHZ2, KMHS3, KMHL2, KMHF2

开关型式	Switch Type	电子式常开型 Solid state N.O.
接点型式	Inducing Switch Type	两线式无接点 2-wire, No sensor
使用电压范围	Voltage Range	10~30V DC
使用温度范围	Temperature Range	-10~70°C
功率	Power	≤3W
压降	Voltage Drop	≤2.65 V @100 mA
感应灵敏度 (高斯)	Induction Delicacy Degree (Gauss)	60~800
防护等级	Enclosure	IP67 (EN60529)

鱼眼接头 Female Rod Ends Joint PHS




特性:

- 杆端为右旋(PHS)或左旋(PHSL)的内螺纹连接
- 外圈球面镶青铜衬垫
- 杆端体表面镀锌, 有润滑油孔或注油嘴

Features:


- Right-hand (PHS) or left hand (PHSL) female thread connection at rod end.
- Outer race lined with bronze liner.
- Surface of rod body zinc plated, rod body with a lubricating hole or grease nipple.





型号 Model	尺寸 Dimensions (mm)														负荷 Load (KN)	
	B	C	D	D1	D2	D3	D4	D5	DK	H	L1	L2	L3	W	动 Dynamic	静 Static
PHS 4-M4x0.7	7	5.25	4	6.5	16	M4×0.7	8	9.5	9.525	24	31	4	8	8	3.0	5.0
PHS 5-M5x0.8	8	6	5	7.70	18	M5×0.8	8.5	11	11.11	27	35	4	10	9	3.25	5.70
PHS 6-M6x1.0	9	6.75	6	8.96	20	M6×1.0	10	13	12.70	30	39	5	12	11	4.3	7.20
PHS 8-M8x1.25	12	9	8	10.4	24	M8×1.25	12.5	16	15.875	36	47	5	16	14	7.2	11.6
PHS 10-M10x1.5	14	10.5	10	12.9	28	M10×1.5	15	19	19.05	43	56	6.5	20	17	10	14.5
PHS 10-M10x1.25	14	10.5	10	12.9	28	M10×1.25	15	19	19.05	43	56	6.5	20	17	10	14.5
PHS 12-M12x1.75	16	12	12	15.4	32	M12×1.75	17.5	22	22.225	50	65	6.5	22	19	13.4	17
PHS 12-M12x1.25	16	12	12	15.4	32	M12×1.25	17.5	22	22.225	50	65	6.5	22	19	13.4	17
PHS 14-M14x2.0	19	13.5	14	16.9	36	M14×2.0	20	25	25.40	57	74	8	25	22	17	24
PHS 14-M14x1.5	19	13.5	14	16.9	36	M14×1.5	20	25	25.40	57	74	8	25	22	17	24
PHS 16-M16x2.0	21	15	16	19.4	40	M16×2.0	22	27	28.575	64	84	8	28	22	21.6	28.5
PHS 16-M16x1.5	21	15	16	19.4	40	M16×1.5	22	27	28.575	64	84	8	28	22	21.6	28.5
PHS 18-M18x1.5	23	16.5	18	21.9	44	M18×1.5	25	31	31.75	71	93	10	32	27	26	42.5
PHS 20-M20x1.5	25	18	20	24.4	46	M20×1.5	27.5	34	34.925	77	100	10	33	30	31.5	42.5
PHS 22-M22x1.5	28	20	22	25.8	54	M22×1.5	30	38	38.10	84	111	12	37	32	38	57
PHS 25-M24x2.0	31	22	25	29.6	60	M24×2.0	33.5	42	42.86	94	124	12	42	36	47.5	68
PHS 28-M27x2.0	35	24	28	32.3	66	M27×2.0	37	46	47.63	103	136	14	48	41	58	75
PHS 30-M30x2.0	37	25	30	34.8	70	M30×2.0	40	50	50.8	110	145	15	51	41	64	88

气缸附件 Cylinder Auxiliaries

浮动接头 Floating Joint KJAT, KJAF

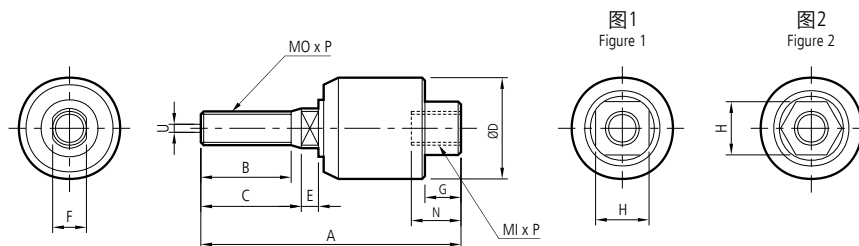

型号 Model	缸径 Bore	MI x P	MO x P	A	B	C	D	E	F	G	H	N	容许误差 Allowable Tolerance U	图号 Figure No.	摆动角度 Rotation Angle
KJA-1004T	8	M4×0.7	M4×0.7	24.5	8	9	12	2	4	4	8	7	0.5	图1 Figure 1	±5°
KJA-1005T	10, 15	M5×0.8	M5×0.8	38	14	15	18	3	5	5	11	9	0.5		
KJA-1006T	15	M6×1.0	M6×1.0	38	14	15	18	3	6	5	11	9	0.5		
KJA-1008T	20	M8×1.25	M8×1.25	50	18	20	24	4	8	7	14	12	0.5		
KJA-1010T	25, 30	(M10×1.25)/1.5	(M10×1.25)/1.5	59	20	22	26	5	10	7	17	14	0.75		
KJA-1014T	40	M14×1.5	M14×1.5	70	21	24	35	7	14	8	22	17	1	图2 Figure 2	
KJA-1018T	50, 63	M18×1.5	M18×1.5	90	26	28	45	9	18	13	28	24	1.25		
KJA-1022T	80	M22×1.5	M22×1.5	103	30	32	55	10	22	16	32	27	2		
KJA-1026T	100	M26×1.5	M26×1.5	130	43	45	61	12	26	19	41	33	2.5	图2 Figure 2	
KJA-1036T	140, 160	(M36×1.5)/2.0	(M36×1.5)/2.0	195	80	82	75	18	36	22	50	41	4		

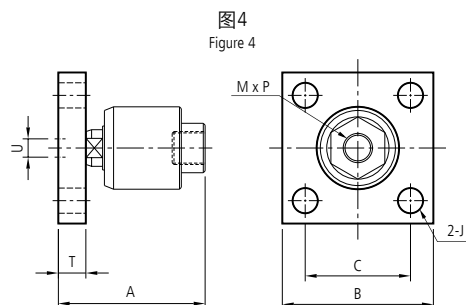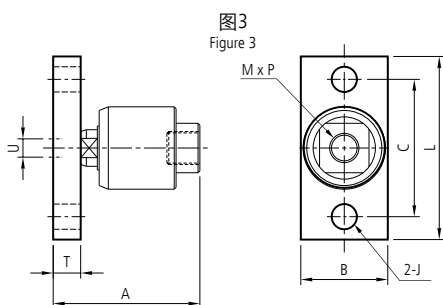

型号 Model	缸径 Bore	M x P	A	B	C	J	L	T	容许误差 Allowable Tolerance U	图号 Figure No.	摆动角度 Rotation Angle
KJA-1008F	20	M8×1.25	38	25	40	7	52	6	0.5	图3 Figure 3	±5°
KJA-1010F	25, 30	M10×1.25	46	32	44	7	56	9	0.75		
KJA-1014F	40	M14×1.5	61	38	60	11	80	12	1		
KJA-1018F	50, 63	M18×1.5	80	74	45	11	-	15	1.25	图4 Figure 4	
KJA-1026F	100	M26×1.5	108	100	70	14	-	21	2.5		
KJA-1030F	125, 140	M30×1.5	117	100	70	14	-	21	2.5		

快速排气阀 Quick Exhaust Valve KAQ



型号 Model	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	
		入-出(In-Out)	出-排气(Out-Exhaust)
KAQ2000-02	1/4"	35	40
KAQ3000-03	3/8"	60	70
KAQ4000-04	1/2"	105	115
KAQ5000-06	3/4"	135	180
KAQ5000-10	1"	176	187

管道限流器 In-line Speed Controller KAS



型号 Model	接管口径 Port Size Rc(PT)	有效截面积 Effective Sectional Area (mm ²)	
		自由流量Free Flow	控制流量Control Flow
KAS2000-01	1/8"	5.2	3.8
KAS2000-02	1/4"	5.2	3.8
KAS4000-02	1/4"	25.5	25.5
KAS4000-03	3/8"	25.5	25.5
KAS4000-04	1/2"	25.5	25.5
KAS5000-04	1/2"	106	116
KAS5000-06	3/4"	123	154
KAS6000-06	3/4"	151	164
KAS6000-10	1"	258	230

油压缓冲器 Shock Absorber AC



型号 Model	螺纹公称 Thread Size	行程 Stroke (mm)	每次最大 吸收能量 Max. Energy Absorption Per Cycle (Nm)	每小时最大 吸收能量 Max. Energy Absorption Per Hour (Nm)	最大有效 重量 Max. Effective Weight (kg)	最大撞击 速度 Max. Impact Speed (m/s)
AC-1412-1	M14x1.5	12	15	36000	8	3
AC-1412-2					50	1.5
AC-1412-3					100	0.8
AC-1416-1		16	20	40000	10	3
AC-1416-2					70	1.5
AC-1416-3					150	0.8
AC-1416-1C				35000	10	3
AC-1416-2C					70	1.5
AC-1416-3C					150	0.8
AC-1425-1		25	25	48000	12	3
AC-1425-2					80	1.5
AC-1425-3					160	0.8
AC-2020-1	M20x1.5	20	40	48000	30	3.5
AC-2020-2					200	2
AC-2020-3					700	1
AC-2030-1		30	50	54000	30	3.5
AC-2030-2					200	2
AC-2030-3					700	1
AC-2050-1	M25x1.5	50	60	66000	60	3.5
AC-2050-2					400	2
AC-2050-3					1200	1
AC-2525-1	M25x1.5	25	80	60000	200	4
AC-2525-2					600	2.5
AC-2525-3					1000	1

气管 Tubing

聚氨酯PU管 Polyurethane Tubing (PU) KPU



型号	Model	KPU0425	KPU0604	KPU0805	KPU1065	KPU1208
管外径	Outside Diameter (mm)	4	6	8	10	12
管内径	Inside Diameter (mm)	2.5	4	5	6.5	8
最小弯曲半径	Minimum Bending Radius (mm)	10	15	20	27	35
流体	Fluid	空气 Air				
最高使用压力 (20°C)	Maximum Operating Pressure (20°C)	0.9 MPa				
环境及流体温度	Ambient and Fluid Temperature	-20~60°C				

难燃性双层聚氨酯 TRBU管 Flame Resistant Double Layer (TRBU) TRBU



型号	Model	TRBU0604	TRBU0805	TRBU1065	TRBU1280
内管外径	O.D. of Internal Tubing (mm)	6	8	10	12
内管内径	I.D. of Internal Tubing (mm)	4	5	6.5	8
外层管厚度	Thickness of External Layer (mm)	1	1	1	1
最小弯曲半径	Minimum Bending Radius (mm)	15	20	27	35
流体	Fluid	空气, 水 Air, water			
最高使用压力 (20°C)	Maximum Operating Pressure (20°C)	0.8 MPa			
环境及流体温度	Ambient and Fluid Temperature	-20~60°C (空气 Air), 0~40°C (水 Water)			

尼龙管(尼龙12) Nylon Tubing (Nylon 12) KNY12



型号	Model	KNY12 -0425	KNY12 -0604	KNY12 -0806	KNY12 -1008	KNY12 -1209	KNY12 -1613
管外径	Outside Diameter (mm)	4	6	8	10	12	16
管内径	Inside Diameter (mm)	2.5	4	6	8	9	13
最小弯曲半径	Minimum Bending Radius (mm)	20	40	50	65	70	130
流体	Fluid	空气, 水 Air, water					
最高使用压力 (20°C)	Maximum Operating Pressure (20°C)	需参考特性曲线图 Need to refer to the characteristics graph					
环境及流体温度	Ambient and Fluid Temperature	-40~100°C					

铁氟龙PTFE管 PTFE Tubing PTFE



型号	Model	PTFE -0402	PTFE -0604	PTFE -0806	PTFE -1008	PTFE -1210
管外径	Outside Diameter (mm)	4	6	8	10	12
管内径	Inside Diameter (mm)	2	4	6	8	10
最小弯曲半径	Minimum Bending Radius (mm)	15	35	60	100	130
流体	Fluid	空气, 水, 化学液体等 Air, water, chemical liquid, etc.				
最高使用压力 (20°C)	Maximum Operating Pressure (20°C)	需参考特性曲线图 Need to refer to the characteristics graph				
环境及流体温度	Ambient and Fluid Temperature	-40~200°C				

金属快插接头 Metal Push-in Fittings/快拧锁母接头 Rapid Fittings/卡套接头 Pipe Joint Fittings

Male Stud MPC	Tube(Metric)-Thread(R)	
	MPC03-M3	MPC08-03
	MPC03-M5	MPC08-04
	MPC04-M5	MPC10-01
	MPC04-01	MPC10-02
	MPC04-02	MPC10-03
	MPC05-M5	MPC10-04
	MPC05-01	MPC12-02
	MPC05-02	MPC12-03
	MPC06-M5	MPC12-04
	MPC06-01	MPC14-03
	MPC06-02	MPC14-04
	MPC08-01	MPC16-03
	MPC08-02	MPC16-04

Male Y MPX	Tube(Metric)-Thread(R)	
	MPX04-M5	MPX10-01
	MPX04-01	MPX10-02
	MPX04-02	MPX10-03
	MPX05-M5	MPX10-04
	MPX05-01	MPX12-01
	MPX05-02	MPX12-02
	MPX06-M5	MPX12-03
	MPX06-01	MPX12-04
	MPX06-02	MPX14-03
	MPX08-01	MPX14-04
	MPX08-02	MPX16-03
	MPX08-03	MPX16-04
	MPX08-04	

Union Tee MPUT	Tube(Metric)	
	MPUT03	
	MPUT04	
	MPUT05	
	MPUT06	
	MPUT08	
	MPUT10	
	MPUT12	
	MPUT14	
	MPUT16	

Swivel Male Elbow RPL	Tube(Metric)-Thread(R)	
	RPL-5/3-M5	RPL-10/8-03
	RPL-5/3-M6	RPL-10/8-04
	RPL-5/3-01	RPL-12/10-03
	RPL-6/4-M5	RPL-12/10-04
	RPL-6/4-M6	
	RPL-6/4-01	
	RPL-6/4-02	
	RPL-6/4-03	
	RPL-8/6-01	
	RPL-8/6-02	
	RPL-8/6-03	
	RPL-10/8-01	
	RPL-10/8-02	

Elbow RPUL	Tube(Metric)	
	RPUL-5/3	
	RPUL-6/4	
	RPUL-8/6	
	RPUL-10/8	
	RPUL-12/10	

Banjo (Compact) RCPH	Tube(Metric)	
	RCPH4/2.5-M5	
	RCPH4/2.5-M6	
	RCPH6/4-M5	
	RCPH6/4-M6	

Male Stud Swivel Elbow MPL	Tube(Metric)-Thread(R)	
	MPL03-M3	MPL08-03
	MPL03-M5	MPL08-04
	MPL04-M5	MPL10-01
	MPL04-01	MPL10-02
	MPL04-02	MPL10-03
	MPL05-M5	MPL10-04
	MPL05-01	MPL12-02
	MPL05-02	MPL12-03
	MPL06-M5	MPL12-04
	MPL06-01	MPL14-03
	MPL06-02	MPL14-04
	MPL08-01	MPL16-03
	MPL08-02	MPL16-04

Union Straight MPUC	Tube(Metric)	
	MPUC03	
	MPUC04	
	MPUC05	
	MPUC06	
	MPUC08	
	MPUC10	
	MPUC12	
	MPUC14	
	MPUC16	

Union Y MPY	Tube(Metric)	
	MPY03	
	MPY04	
	MPY05	
	MPY06	
	MPY08	
	MPY10	
	MPY12	
	MPY14	
	MPY16	

Swivel Male Tee RPT	Tube(Metric)-Thread(R)	
	RPT-5/3-M5	RPT-10/8-03
	RPT-5/3-M6	RPT-10/8-04
	RPT-5/3-01	RPT-12/10-03
	RPT-6/4-M5	RPT-12/10-04
	RPT-6/4-M6	
	RPT-6/4-01	
	RPT-6/4-02	
	RPT-6/4-03	
	RPT-8/6-01	
	RPT-8/6-02	
	RPT-8/6-03	
	RPT-10/8-01	
	RPT-10/8-02	

Tee RPUT	Tube(Metric)	
	RPUT-5/3	
	RPUT-6/4	
	RPUT-8/6	
	RPUT-10/8	
	RPUT-12/10	

Male Straight QPC	Tube(Metric)-Thread(R)	
	QPC04-01	
	QPC04-02	
	QPC06-01	
	QPC06-02	
	QPC08-01	
	QPC08-02	
	QPC08-03	
	QPC10-02	
	QPC10-03	
	QPC10-04	
	QPC12-02	
	QPC12-03	
	QPC12-04	

Male Stud Branch Tee MPT	Tube(Metric)-Thread(R)	
	MPT04-M5	MPT10-01
	MPT04-01	MPT10-02
	MPT04-02	MPT10-03
	MPT05-M5	MPT10-04
	MPT05-01	MPT12-01
	MPT05-02	MPT12-02
	MPT06-M5	MPT12-03
	MPT06-01	MPT12-04
	MPT06-02	MPT14-03
	MPT08-01	MPT14-04
	MPT08-02	MPT16-03
	MPT08-03	MPT16-04
	MPT08-04	

Union Elbow MPUL	Tube(Metric)	
	MPUL03	
	MPUL04	
	MPUL05	
	MPUL06	
	MPUL08	
	MPUL10	
	MPUL12	
	MPUL14	
	MPUL16	

Male Straight RPC	Tube(Metric)-Thread(R)	
	RPC-5/3-M5	RPC-10/8-03
	RPC-5/3-M6	RPC-10/8-04
	RPC-5/3-01	RPC-12/10-03
	RPC-6/4-M5	RPC-12/10-04
	RPC-6/4-M6	
	RPC-6/4-01	
	RPC-6/4-02	
	RPC-6/4-03	
	RPC-8/6-01	
	RPC-8/6-02	
	RPC-8/6-03	
	RPC-10/8-01	
	RPC-10/8-02	

Union Straight RPUC	Tube(Metric)	
	RPUC-5/3	
	RPUC-6/4	
	RPUC-8/6	
	RPUC-10/8	
	RPUC-12/10	


Male Straight (Compact) RCPC	Tube(Metric)	
	RCPC4/2.5-M5	
	RCPC4/2.5-M6	
	RCPC6/4-M5	
	RCPC6/4-M6	

Male Elbow QPL	Tube(Metric)-Thread(R)	
	QPL04-01	
	QPL04-02	
	QPL06-01	
	QPL06-02	
	QPL08-01	
	QPL08-02	
	QPL08-03	
	QPL10-02	
	QPL10-03	
	QPL10-04	
	QPL12-02	
	QPL12-03	
	QPL12-04	

卡套接头 Pipe Joint Fittings/管道接头 Pipe Fittings/气动单开闭快速接头 Pneumatic Single Shut-off Couplings

Male Tee QPT 	Tube(Metric)-Thread(R) QPT04-01 QPT04-02 QPT06-01 QPT06-02 QPT08-01 QPT08-02 QPT08-03 QPT10-02 QPT10-03 QPT10-04 QPT12-02 QPT12-03 QPT12-04	Union Straight QPUC 	Tube(Metric) QPUC04 QPUC06 QPUC08 QPUC10 QPUC12	Union Elbow QPUL 	Tube(Metric) QPUL04 QPUL06 QPUL08 QPUL10 QPUL12
Union Tee QPUT 	Tube(Metric) QPUT04 QPUT06 QPUT08 QPUT10 QPUT12	Straight Male PSM 	Thread(R)T1-Thread(R)T2 PSM 01-01 PSM 06-02 PSM 02-02 PSM 08-08 PSM 02-01 PSM 08-06 PSM 03-03 PSM 08-04 PSM 03-02 PSM 08-03 PSM 03-01 PSM 04-04 PSM 04-03 PSM 04-02 PSM 04-01 PSM 06-06 PSM 06-04 PSM 06-03	Equal Male Stud Elbow PEL 	Thread(R) PEL 01 PEL 02 PEL 03 PEL 04 PEL 06 PEL 08
Equal Female Stud Elbow PFL 	Thread(G) PFL G01 PFL G02 PFL G03 PFL G04 PFL G06 PFL G08	Reduce Male to Female PRMF 	Thread(R)T1-Thread(G)T2 PRMF 02-G01 PRMF 03-G01 PRMF 03-G02 PRMF 04-G01 PRMF 04-G02 PRMF 04-G03 PRMF 06-G02 PRMF 06-G03 PRMF 06-G04	Plug POH 	Thread(R) POH M5 POH 01 POH 02 POH 03 POH 04 POH 06 POH 08
Male Stud Branch Tee PMT 	Thread(R) PMT 01 PMT 02 PMT 03 PMT 04 PMT 06 PMT 08	Equal Female Tee PFT 	Thread(R) PFT 01 PFT 02 PFT 03 PFT 04 PFT 06 PFT 08	Male Barb PHTM 	Tube(Metric)-Thread(R) PHTM05-01 PHTM12-03 PHTM05-02 PHTM12-04 PHTM07-01 PHTM17-03 PHTM07-02 PHTM17-04 PHTM08-01 PHTM18-03 PHTM08-02 PHTM18-04 PHTM09-01 PHTM09-02 PHTM09-03 PHTM10-01 PHTM10-02 PHTM10-03 PHTM12-02

Automatic Coupler With 4 Balls Male Pipe Thread ESM	Part No.	Body Size (in.)	Thread Size BSP	Dimensions (in.) Overall Length	Dimensions (in.) Hex Size	Dimensions (in.) Largest Diameter
	ESM1-01	1/8	G 1/8	1.37	0.55	0.70
	ESM1-02	1/8	G 1/4	1.45	0.66	0.70
	ESM2-02	1/4	G 1/4	2.55	0.81	0.98
	ESM2-03	1/4	G 3/8	2.58	0.81	0.98

Nipple Male Pipe EPM	Part No.	Body Size (in.)	Thread Size BSP	Dimensions (in.) Overall Length	Dimensions (in.) Exposed Length	Dimensions (in.) Hex Size	Dimensions (in.) Largest Diameter
	EPM1-01	1/8	G 1/8	1.06	0.53	0.43	0.51
	EPM1-02	1/8	G 1/4	1.20	0.67	0.55	0.63
	EPM2-01	1/4	G 1/4	1.77	0.89	0.56	0.72
	EPM2-02	1/4	G 3/8	1.80	0.92	0.69	0.94

由于产品种类较多，且不断推出新品及改进产品功能，本公司保留根据市场需求更新规格的权利，但不会另行通知。

ARK 2018年9月 出版